



WINCHESTER RD.

AREA OF WORK

HACK'S CROSS RD.

0 20' 40' 80'

1" = 40'-0"

TSG-1	TITLE SHEET
C1-0	COVER
C2-0	SURVEY
C3-0	SITE DEMOLITION PLAN
C4-0	OVERALL LAYOUT PLAN
C4-1	SITE LAYOUT PLAN
C5-0	DETAILED UTILITY PLAN
C6-0	DETAILED GRADING PLAN
C6-1	DETAILED GRADING PLAN
C6-2	PROFILES
C7-0	INITIAL EROSION CONTROL PLAN
C7-1	INTERMEDIATE AND FINAL EROSION CONTROL PLAN
D1-0	CONSTRUCTION DETAILS
D1-1	CONSTRUCTION DETAILS
D1-2	CONSTRUCTION DETAILS
L1-0	TREE REPLACEMENT PLAN I
L1-1	TREE REPLACEMENT PLAN II
SE-1	SITE ELECTRICAL
DAG-1	DEMOLITION SITE PLAN
S1-1	ENLARGED SITE PLAN
AG-2	CANOPY ELEVATIONS AND SECTIONS
AG-4	CANOPY REFLECTED CEILING PLAN
AG-5	CONTROLLER ENCLOSURE PLANS, ELEVATIONS AND DETAILS
AG-6	SITE DETAILS
S1-0	CANOPY SPECIAL INSPECTIONS AND GENERAL NOTES
S1-1	CANOPY FOUNDATION PLAN
S1-2	CANOPY FOUNDATION DETAILS
S2-0	CANOPY ROOF FRAMING PLAN
S2-1	CANOPY ROOF FRAMING DETAILS

OWNER

COSTCO WHOLESALE CORPORATION
730 LAKE DRIVE
ISSAQUAH, WA 98027
T. 425.313.8100

ARCHITECT

MG2 CORPORATION
8444 WESTPARK DRIVE, SUITE 120
MAGLEEN, WA 22102
T. 703.564.8406
F. 703.564.8400
PROJECT MANAGER: AGNES VINCENT

**CIVIL ENGINEER
AND SURVEYOR**

AEC
50 WARM SPRINGS CIRCLE
SUITE 110
ROSWELL, GA 30075
T. 678.990.2408

**GEOTECHNICAL
ENGINEER**

TERRACON CONSULTANTS, INC.
4040 ROYAL DRIVE, SUITE 100
KENNESAW, GA 30144
T. 770.623.0755

**LANDSCAPE
ARCHITECT**

AEC
50 WARM SPRINGS CIRCLE
SUITE 110
ROSWELL, GA 30075
T. 678.990.2408

**STRUCTURAL
ENGINEER**

GMA
301 N. FIRST ST., SUITE 110
FRESNO, CA 93720
T. 559.435.1411
F. 559.435.1189

**TANK/
ELECTRICAL/
ENGINEER**


BARNSHAUSEN CONSULTING ENGINEERS, INC.
18215 JEN AVENUE SOUTH
KENT, WA 98032
T. 425.251.8222
F. 425.251.8782

GOVERNING BUILDING CODE:	2021 INTERNATIONAL BUILDING CODE W/ LOCAL AMENDMENTS 2021 INTERNATIONAL MECHANICAL CODE W/ LOCAL AMENDMENTS 2021 FUEL GAS CODE W/ LOCAL AMENDMENTS 2020 NATIONAL ELECTRIC CODE W/ TENN. AMENDMENTS 2021 INTERNATIONAL PLUMBING CODE W/ LOCAL AMENDMENTS 2021 INTERNATIONAL ENERGY CONSERVATION CODE W/ LOCAL AMENDMENTS
OCCUPANCY GROUP:	M
CONSTRUCTION TYPE:	II B (NOT RATED)
FUEL CANOPY AREA:	4,576 SQ FT
FUEL CANOPY HEIGHT:	17'-6" TO TOP OF CANOPY


FOR ADDITIONAL ABBREVIATIONS:
SEE OTHER DESIGN DISCIPLINES

ADJ	ADJUSTABLE, ADJACENT	E	EXISTING	MTL	METAL	REQ'D	REQUIRED
ALUM	ALUMINUM	ENCL	ENCLOSURE	MFG	MANUFACTURING	SCHED	SCHEDULE
APPROX	APPROXIMATE	EQUAL	EQUAL	MAN	MANUFACTURER	SHEET	SHEET
BD	BOARD	ETC	ET CETERA	MH	MANHOLE	SIM	SIMILAR
BLDG	BUILDING	EXH	EXHAUST	MIN	MINIMUM	SIO	SUPPLIED & INSTALLED BY OWNER
BLK	BLACK	EXIST	EXISTING	MISC	MISCELLANEOUS	SIV	SUPPLIED & INSTALLED BY VENDOR
BLK'G	BLOCKING	EXP	EXPANSION	MR	MOISTURE RESISTANT	SJ	SAW-CUT JOINT
BM	BEAM	EXT	EXTERIOR	MTD	MOUNTED	SOIC	SUPPLIED BY OWNER & INSTALLED BY CONTRACTOR
BTWN	BETWEEN	FD	FLOOR DRAIN	MOUNTING		SPEC'D	SPECIFIED
CB	CATCH BASIN	FF	FINISHED FLOOR	NIC	NOT IN CONTRACT	SQ	SQUARE
CI	CAST IRON	FL	FLOOR	NOM	NOMINAL	SS	SANITARY SEWER
CL	CAST IN PLACE	FIN	FINISH	NT	NOT TO SCALE	STD	STANDARD
CJ	CONSTRUCTION JOINT	FT	FEET	OA	OVERALL	STL	STEEL
CL	CENTER LINE	FTG	FOOTING	OC	ON CENTER	STRUCT	STRUCTURE, STRUCTURAL
CLS	CLEAR	GA	GAUGE	OH	OVERHEAD	SYS	SYSTEM
CMU	CONCRETE MASONRY UNIT	GC	GENERAL CONTRACTOR	OPER	OPERATION	T & E	TANK & ELECTRICAL
COL	COLUMN	GA	HANDICAPPED	OPG	OPENING	TOM	TOP OF MASONRY
CONC	CONCRETE	HORIZ	HORIZONTAL	OPP	OPPOSITE	TOP	TOP OF FLOOR
CONT	CONTINUOUS	HT	HEIGHT	PVC	POLY VINYL CHLORIDE	TS	TUBE STEEL
CONSTR	CONSTRUCTION	HTR	HEATER	PL	PLATE, PROPERTY LINE	TY	TYPICAL
CRP	CORPORATION	IBC	INTERNATIONAL BLDG CODE	PROJ	PROJECT	UNIT	UNITED LABORATORIES
DBL	DOUBLE	INSUL	INSULATION	PRV	PRESSURE REDUCING VALVE	UTIL	UTILITY
DIA	DIAMETER	INT	INTERIOR	PT	POINT	UNL	UNLESS NOTED OTHERWISE
DIMENSION		JT/UTS	JOINT JOINTS	QTR	QUARTER	UNSHED	UNSHEDLED
DTL	DETAIL	LCD	LIQUID CRYSTAL DISPLAY	R	RADIUS	VERT	VERTICAL
DS	DOWNSPOUT	LF	LINEAR FOOT, LINEAL FOOT	RCP	REFLECTED CEILING PLAN	VIF	VERIFY IN FIELD
DWG	DRAWING	LQ	LIQUID	RD	ROOF DRAIN	WH	WAREHOUSE
EA	EACH	MAS	MASONRY	RF	ROLLED FORMED	W	WITH
ELEC	ELECTRICAL	MAX	MAXIMUM	RL	RAIN LEADER	W	WITH
ELEV	ELEVATION	MBS	METAL BUILDING SUPPLIER	REC'D	RECEIVED	W/O	WITHOUT
		MECH	MECHANICAL	REINF	REINFORCING	WDW	WINDOW
						WP	WATERPROOF
						WR	WATER RESISTANT

SYMBOLS

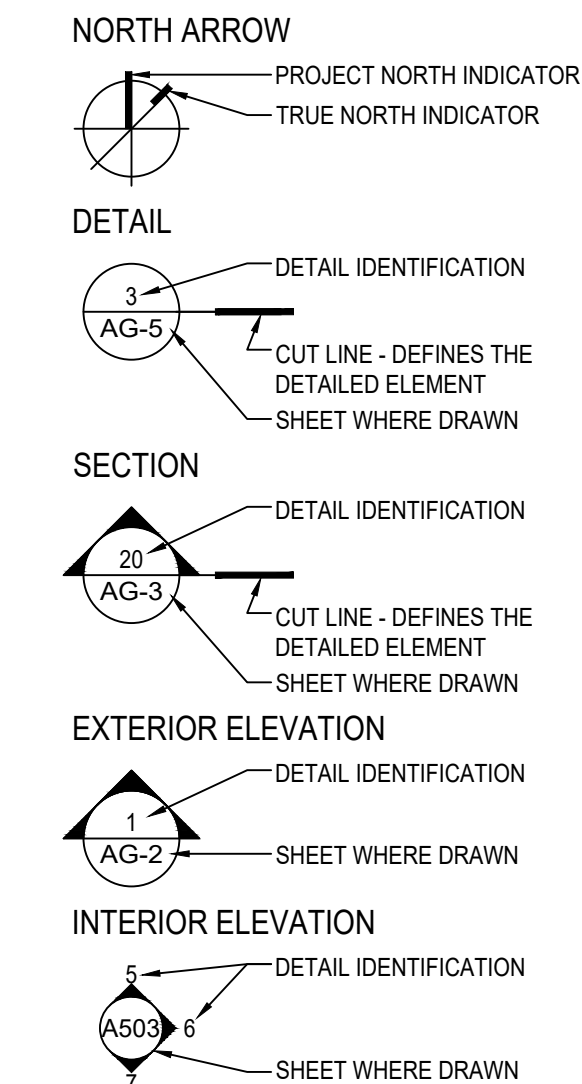

011 EQUIPMENT NUMBER -
REFER TO SCHEDULE

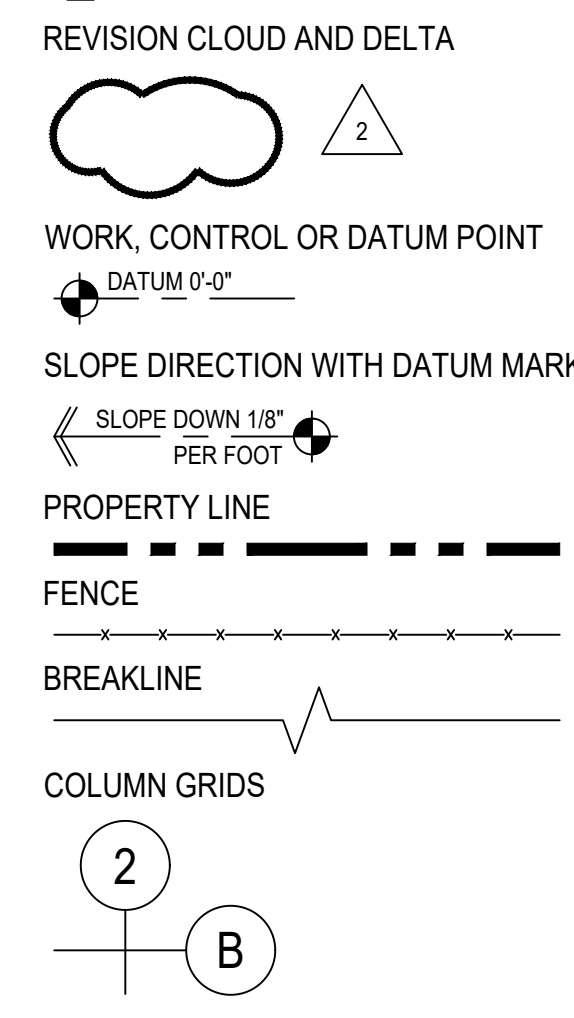

 CONCRETE
 EARTH
 GRAVEL
 CMU OR BR
 STEEL

THE FOLLOWING DESCRIBED REAL PROPERTY IS SITUATED IN THE CITY OF S.E. MEMPHIS,
SHELBY COUNTY, STATE OF TENNESSEE.

1. ZONING:	PLANNED DEVELOPMENT
2. SETBACKS:	REQUIRED
FRONT:	24 FT
REAR:	NONE
SIDE:	20 FT
3. SITE AREA:	14.24 ACRES (620,460 S.F.)
4. LOT COVERAGE ALLOWED:	100%
5. LANDSCAPING REQUIRED:	YES, SEE CIVIL
6. EXISTING BUILDING AREA:	
BUILDING FOOTPRINT AREA:	149,448 SQ FT
7. PARKING REQUIRED:	
1/300 SQ FT x 149,448 SQ FT TOTAL = 498 PARKING SPACES REQ'D	
8. PARKING PROVIDED:	
EXISTING PARKING:	709 STALLS
DELETED PARKING:	36 STALLS
TOTAL:	683 STALLS
PARKING RATIO:	683 STALLS (15 ACCESSIBLE STALLS) 1/300 SQ FT

FUELING FACILITY EXPANSION:

THE SCOPE OF WORK INCLUDES ADDING THREE (3) NEW ISLANDS WITH ONE DOUBLE SIDED FUEL DISPENSER EACH; ALLOWING FOR SIX (6) ADDITIONAL AUTOMOBILE FUELING POSITIONS, REMOVING AND REPLACING THE EXISTING (6) DISPENSERS, ENLARGING THE EXISTING CANOPY BY 1,696 SQUARE FEET, AND CURBS, CONCRETE, ASPHALT AND LANDSCAPE REVISIONS. THE EXISTING CONTROLLER ENCLOSURE WILL BE DEMOLISHED AND A NEW ONE WILL BE PROVIDED.

THE NINE (9) NEW DISPENSERS WILL BE INTEGRATED INTO THE COMPUTERIZED CONTROLLER, WHICH RUNS THE PAYMENT, PUMPING AND MONITORING SYSTEMS. FUEL IS STORED IN THREE (3) EXISTING DOUBLE WALLED, FIBERGLASS UNDERGROUND STORAGE TANKS.


THE NEW CONTRACT 24 HOUR MONITORING SYSTEM WILL INCLUDE AN ALARM TIED INTO THE OWNER'S CONTRACTED 24 HOUR MONITORING SERVICE COMPANY. THE CONTINUOUS LEAK DETECTION SYSTEM WILL AUTOMATICALLY CHECK FOR FLUID LEAKS AND AUTOMATICALLY WILL STOP THE FLOW OF GASOLINE IN THE EVENT OF AN ALARM CONDITION.

[illegible]

4150-19
AGNES VINCENT
AWN: AV
AUGUST 08, 2023

TLE SHEET

- SG-1

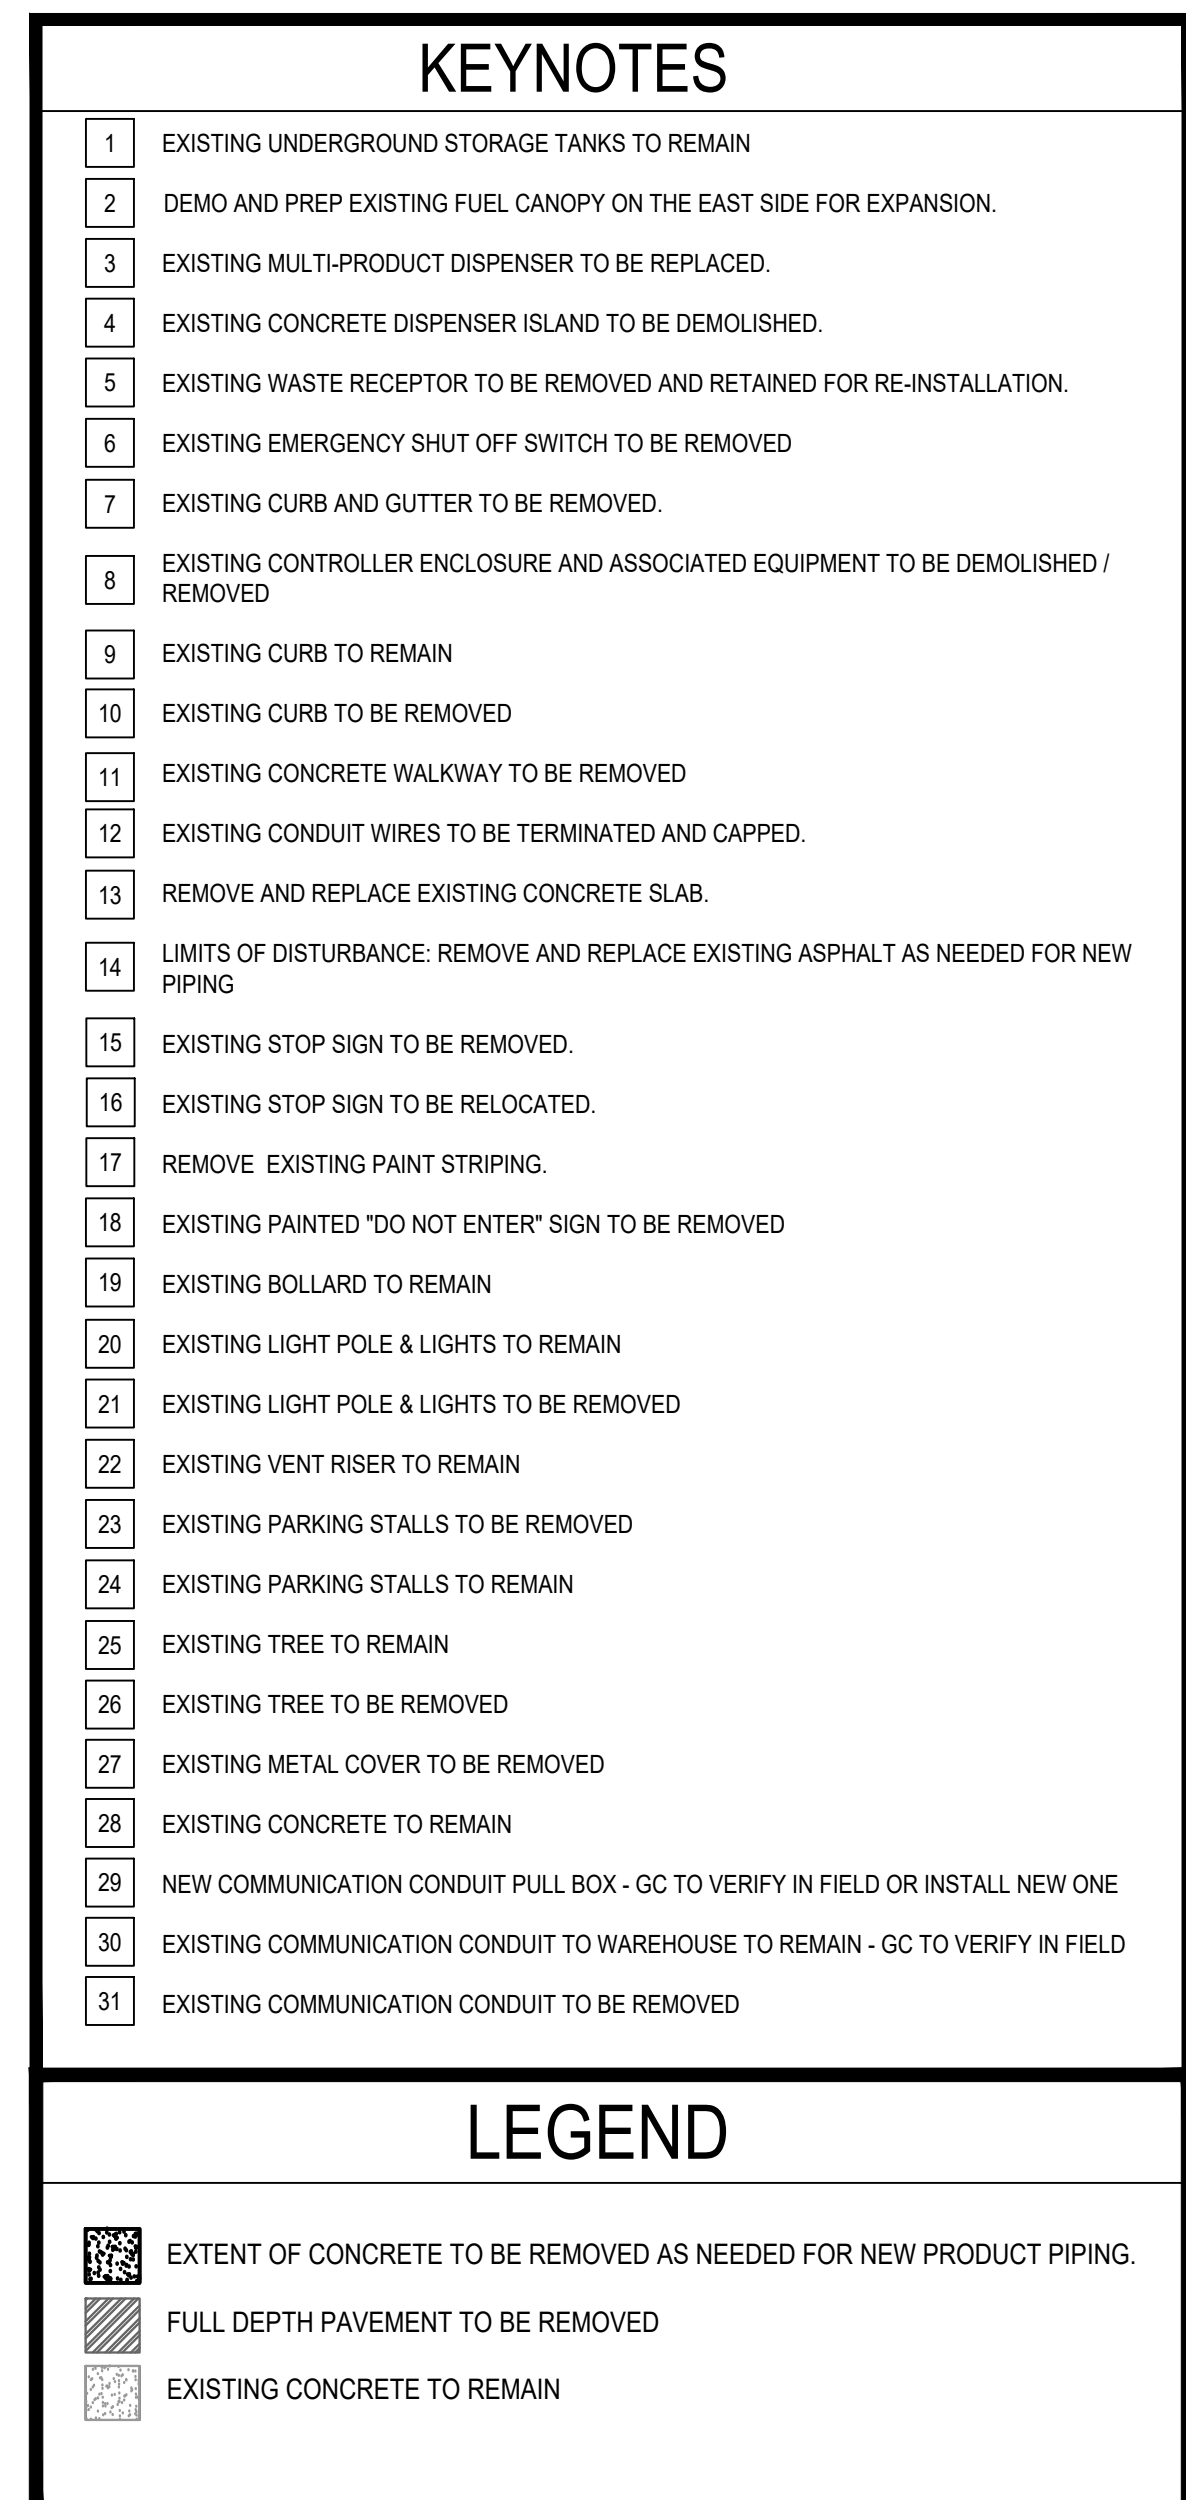

DEMOLITION NOTES

THE BUILDING WILL BE OCCUPIED AND IN FULL USE BY THE OWNER DURING CONSTRUCTION.

1. CONSTRUCTION THAT MAY AFFECT THE PUBLIC SHALL BE DONE DURING OFF-HOURS.

2. AREAS OF DEMOLITION SHALL INCLUDE, BUT ARE NOT LIMITED TO, ANY STRUCTURAL, PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION, ETC. ITEMS REQUIRED TO COMPLETE THE DEMOLITION WORK. THE CONTRACTOR IS TO REMOVE ALL WALLS, BOLLARDS, MISC. STEEL, PLUMBING, ELECTRICAL, RAISED CONCRETE SLAB, CURBS, REBARS, ETC.

3. ALL REMOVED ITEMS NOT DESIGNATED FOR REUSE SHALL BE OFFERED IN GOOD CONDITION TO THE OWNER. DURING THE BIDDERING PERIOD, COORDINATE AND VERIFY WITH THE OWNER THAT ALL ITEMS ARE TO BE REMOVED.

4. DO NOT INTERRUPT ANY SERVICES (WATER, PLUMBING, FIRE SPRINKLER, ETC.) WITHOUT WRITTEN APPROVAL OF THE OWNER.

5. PROVIDE TO MAINTAIN ACCESS PATHS THROUGHOUT CONSTRUCTION INCLUDING, BUT NOT LIMITED TO, EXIT SIGNS, LIGHTING, FIRE SPRINKLERS, ETC. OBTAIN FIRE MARSHAL APPROVAL PRIOR TO CLOSING ANY EGRESS OPENINGS AND/OR EGRESS PATHS DURING DEMOLITION/CONSTRUCTION.

6. THE CONTRACTOR SHALL LOCATE ALL EXISTING UNDERGROUND UTILITIES WITHIN PROXIMITY OF THE WORK AREA PRIOR TO EXCAVATION.

7. PROVIDE UTILITIES SHOWN ON THE DRAWINGS OTHERWISE, DO NOT SUPPORT OR SUSPEND ITEMS, EXPOSED FOR CONVENIENCE ONLY. VERIFY ALL INVERT ELEVATIONS AT POINTS OF CONNECTIONS OF NEW WORK TO EXISTING PRIOR TO STARTING ANY WORK.

8. PROVIDE TEMPORARY DRAINAGE TO REMOVE ALL EXCESS WATER, DUST AND DEBRIS FROM SETTLING ON ADJACENT AREAS NOT UNDER CONSTRUCTION. REVIEW WITH AND OBTAIN OWNER'S APPROVAL FOR LOCATIONS.

9. GIVE UTILITIES AND SERVICES ADEQUATE WARNING PRIOR TO REMOVAL. THE CONTRACTOR IS RESPONSIBLE FOR FLOOR PATCHING.

10. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING OR REPLACING ITEMS DAMAGED DURING DEMOLITION AND CONSTRUCTION.

11. WHEN CUTTING AND PATCHING, THE CONTRACTOR SHALL USE METHODS LEAST LIKELY TO DAMAGE ELEMENTS RETAINED OR ADJOINING SURFACES. CUT HOLES AND SLOTS AS SMALL AS PRACTICALLY POSSIBLE. NEATLY TO SIZE REQUIRED AND WITH MINIMUM DIMENSIONS OF QUARTER INCHES.

12. WHERE EXISTING CONSTRUCTION IS REMOVED, CUT OR OTHERWISE DISTURBED, PATCH TO MATCH THE EXISTING ADJACENT SURFACES. SEAMS TO BE AS INVISIBLE AS PRACTICAL. PROVIDE FINISHES MATCH TO THE CLOSEST TO THE NEAREST WALL, BREAK LINES SUCH AS CORNERS, CEILING LINES, TOP OF BASE, ETC.

13. WHERE NEW WORK ABUTS OR LAINS WITH EXISTING, FORM A SMOOTH AND EVEN TRANSITION. PATCHED WORK TO MATCH EXISTING ADJACENT WORK IN TEXTURE AND APPEARANCE.

14. REMOVE AND REPLACE AREAS, SURFACES OR PORTS THAT CANNOT BE SATISFACTORILY PATCHED.

15. AS A MINIMUM, THE LEVEL OF WORKMANSHIP SHOULD MATCH THE GENERAL LEVEL OF EXISTING WORKMANSHIP.

16. OVER THE WORK ON THE DRAWINGS OTHERWISE, DO NOT SUPPORT OR SUSPEND ITEMS, EQUIPMENT, HANGERS, ETC. FROM EXISTING STRUCTURAL MEMBERS (BEAMS, TRUSSES, JOIST, ETC.) WITHOUT WRITTEN APPROVAL OF A LICENSED STRUCTURAL ENGINEER.

17. DO NOT CUT OR DRILL ANY MEMBER OR MEMBER JOINT UNLESS REQUIRED. WITHOUT WRITTEN APPROVAL OF A LICENSED STRUCTURAL ENGINEER.

18. SHORING OF STRUCTURAL FOUNDATIONS, STRUCTURES, AND/OR TRENCHING REQUIRED TO COMPLY WITH THE WORK DEMANDS SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. IF A REGULATORY AGENCY REQUIRES A LICENSED ENGINEER TO SUPERVISE, APPROVE, AND/OR PROVIDE DRAINAGE FOR STRUCTURAL FOUNDATIONS, TRENCHES, ETC., THE CONTRACTOR SHALL BE RESPONSIBLE OF THE CONTRACTOR TO COORDINATE WITH THE ENGINEER DIRECTLY AND THE COST SHALL BE INCLUDED IN THE BASE BID.

19. ALL SYSTEMS AND SERVICES ARE TO BE LEFT OPERATIONAL PRIOR TO THE END OF EACH WORKDAY.

20. THE CONTRACTOR SHALL REMOVE ALL RUBBLE AND DEBRIS FROM THE JOBSITE DAILY AND LEAVE THE BUILDING AND GROUNDS PRISTINE CLEAN UPON COMPLETION OF THE WORK.

OPERATIONAL PHASING NOTES

1. THE CONTRACTOR TO SUBMIT PHASING PLAN AT BID. THE CONTRACTOR SHALL CONFIRM THE OPERATIONAL PHASING WITH THE OWNER PRIOR TO STARTING CONSTRUCTION.


2. THE PHASING SHOWN IS NOT INTENDED TO REPRESENT OR DICTATE CONSTRUCTION SEQUENCE, REBARING, MECHANICAL, ETC. PHASING.

3. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL CONSTRUCTION PHASING SO AS NOT TO IMPACT THE OWNER'S OPERATIONS.

4. REMOVE WALLS, BOLLARDS, PLUMBING, ELECTRICAL, ETC. AND CAP UTILITIES BELOW THE FLOOR AS REQUIRED TO ACHIEVE THE OPERATIONAL PHASING.

5. PROVIDE TEMPORARY UTILITIES AS REQUIRED DURING PHASING.

6. OVER THE WORK INCLUDE ADEQUATE AND TEMPORARY COVERING OF THE EXISTING EXTERIOR SIGNAGE. THE CONTRACTOR SHALL PROVIDE A TEMPORARY "COSTLY WHOLESALE" SIGNAGE (OF SIZE COMPARABLE TO EXISTING SIGN) UNTIL PERMANENT SIGN IS INSTALLED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE TEMPORARY SIGNAGE. PROVIDE ILLUMINATION FOR THE TEMPORARY SIGN. CONFORM LOCATIONS WITH THE OWNER.

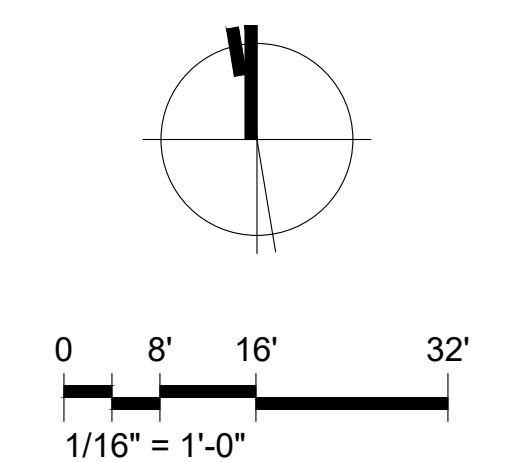

DOUGLAS E. BROOKBANK, ARCHITECT



1	EXISTING UNDERGROUND STORAGE TANKS
2A	EXISTING FUEL CANOPY
2B	NEW FUEL CANOPY EXPANSION
3	NEW ACCESSIBLE MULTI-PRODUCT DISPENSER - SEE DETAILS T-6
4	NEW CONCRETE DISPENSER ISLAND
5A	REINSTALL EXISTING WASTE RECEPTOR
5B	WASTE RECEPTOR, BOLTED DOWN, COMMERCIAL ZONE, 33 US GALLON ROUND, #72Z01, BLACK-18Y GC
6	FIRE EXTINGUISHER, QUANTITY AS SHOWN ON PLAN, MOUNTED ON COLUMN SIDE FACING FUEL DISPENSER - FIRE EXTINGUISHER CABINET TO BE BROOKS MODEL # MARK II, RED, CABINET WITH CLEAR COVER (OR EQUAL) - FIRE EXTINGUISHER AND CABINET SUPPLIED BY CONTRACTOR
7	NEW EMERGENCY SHUT OFF SWITCH
8	PRE-FABRICATED PRE-ENGINEERED NEW CONTROLLER ENCLOSURE: SEE AG-5A
9A	EXISTING CONCRETE CURB
9B	NEW CONCRETE CURB
10A	EXISTING CONCRETE SLAB
10B	NEW CONCRETE SLAB - SEE AG-6, STRUCTURAL TANK AND CIVIL DRAWINGS
10C	NEW HEAVY DUTY ASPHALT: SEE CIVIL
11	PROPOSED CONCRETE SWALE - SEE CIVIL
12	EXISTING VENT STACK TO REMAIN
13	EXISTING SITE LIGHT TO REMAIN.
14	NEW SITE AREA LIGHT
15	NEW BOLLARD - SEE DETAIL 14A / AG-6
16	NEW "STOP" AND "DO NOT ENTER" SIGN - SEE DETAIL 8 / AG-6
17	RELOCATED EXISTING "STOP" SIGN AND ADD DO NOT ENTER SIGN.
18	EXISTING BOLLARDS
19	NEW PAINTED TRAFFIC CONTROL STRIPING - SEE DETAIL 2 / AG-6
20	NEW PAINTED "DO NOT ENTER" SIGN - SEE DETAIL 13 / AG-6
21	NEW PAINTED "STOP" / BAR - SEE DETAIL 13 / AG-6
22	NEW PAINTED TRAFFIC ARROW - SEE DETAIL 4 / AG-6
23	EXISTING "MEMBERS ONLY" SIGN
24	NEW "MEMBERS ONLY" SIGN - SEE DETAIL 9 / AG-6
25	NEW DRAIN INLET - SEE CIVIL
26	SPEED BUMP - SEE DETAIL 1 / AG-6
27	CONTROL JOINT AT END OF ISLANDS - SEE 18 / AG-6
28	NEW "IN CASE OF FIRE OR SPILL" SIGNAGE ON FOUR SIDES - SEE AG-2, 11/AG-6
29	NEW "NO SMOKING / STOP ENGINE" SIGNAGE ON TWO SIDES- SEE AG-2, 11/AG-6
30	NEW SPLICE BOX BY GC OR UTILITY CO.
31	NEW ELECTRICAL CONDUIT BY GC OR UTILITY CO.
32	NEW CONTAINMENT SUMP: SEE T1-1
33	NEW TMS ADDITIVE CABINET - SEE 5 / AG-6
34	NEW VST GREEN MACHINE - SEE 10 / AG-6
35	NEW OVERFILL ALARM ON PEDESTAL - SEE 15 / AG-6
36	EXISTING PARKING STALLS
37	NEW PARKING STALLS
38	NEW LANDSCAPING - TO MATCH EXISTING ON SITE WHERE DISTURBED
39	NOT USED
40	EXISTING TREE
41	NEW OIL WATER SEPARATOR
42	REINSTALL EXISTING DISPENSER
43	NEW COMMUNICATION CONDUIT PULL BOX - GC TO VERIFY IN FIELD OR INSTALL NEW ONE
44	EXISTING COMMUNICATION CONDUIT TO WAREHOUSE - GC TO VERIFY IN FIELD
45	NEW COMMUNICATION CONDUIT TO CONTROLLER ENCLOSURE - BY GC OR UTILITY CO.

 PROPOSED CONCRETE SLAB
 PROPOSED ASPHALT SLURRY SEAL
 EXISTING CONCRETE

A. ALL WORK, MATERIALS, METHODS, ETC. SHALL CONFORM TO ALL GOVERNING BUILDING CODES, REGULATIONS AND AGENCIES.

B. PROVIDE PEDESTRIAN OR VEHICULAR PROTECTION BARRICADES, TEMPORARY GUARD RAILS AND ANCHORS AS REQUIRED BY THE LOCAL AUTHORITIES OR AS NECESSARY FOR PEDESTRIAN AND VEHICULAR SAFETY.

C. THE DEVELOPER'S NAME, ADDRESS AND PHONE NUMBER TO BE CONSPICUOUSLY POSTED AT THE CONSTRUCTION SITE DURING ALL PHASES OF CONSTRUCTION.

D. ITEMS NOTED AS EXISTING TO REMAIN, CONTRACTOR SHALL REPAIR AND/OR REPLACE AT CONTRACTOR'S EXPENSE, ANY EXISTING FACILITIES TO REMAIN THAT ARE DAMAGED BY CONTRACTOR'S OPERATIONS.

E. ALL PAVING OR CONCRETE THAT IS DESTROYED OR REMOVED AS A RESULT OF CONSTRUCTION SHALL BE REPLACED OR PATCHED BY THE GC IN A MANNER THAT MATCHES OR IMPROVES THE APPEARANCE OF THE EXISTING PAVING OR CONCRETE. ALL PAVEMENT EXPENSE PRIOR TO INSTALLING ADJACENT PAVEMENT. DOWEL CONCRETE SURFACES WITH #4 DOWELS AT 18" OC.

F. VERIFY DIMENSIONS, LINES, GRADES, ELEVATIONS, AND SITE CONDITIONS PRIOR TO COMMENCING WORK. NOTIFY ARCHITECT PROJECT MANAGER IMMEDIATELY OF ANY DISCREPANCIES.

G. CONTRACTOR SHALL TAKE ADEQUATE PROTECTIVE MEASURES AND EXERCISE EXTREME CAUTION WHEN EXCAVATING OR DISTURBING EXISTING UNDERGROUND UTILITIES. ANY DAMAGE TO EXISTING UNDERGROUND UTILITIES SHALL BE REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE.

H. SEE CIVIL DRAWINGS FOR GRADING AND DRAINAGE INFORMATION. NO CLEAN-OUTS TO BE LOCATED IN THE UNDER CANOPY SLAB.

I. SEE LANDSCAPE DRAWINGS FOR PLANTING AND IRRIGATION INFORMATION.

J. SEE SHEET AG-2, AG-4 AND AG-6 FOR CANOPY ELEVATIONS, CANOPY REFLECTED CEILING PLAN, SIGN DETAILS, AND CANOPY MATERIALS.

K. SEE ELECTRICAL DRAWINGS FOR SITE ELECTRICAL.

L. ALL ELECTRICAL CONDUIT OR CABLE, WHERE SUBJECT TO VEHICULAR TRAFFIC SHALL BE A MINIMUM OF 16" COVER.

M. SEE TANK AND ELECTRICAL DRAWINGS FOR FUEL PIPING RUNS AND ELECTRICAL CONDUIT RUNS FOR UNDERGROUND STORAGE TANKS, DISPENSER, LIGHT FIXTURES AND SECURITY CAMERAS. ALL UNDERGROUND PIPING AND ELECTRICAL SHALL BE PROTECTED. THE PROTECTION ROUTE SHOULD BE DETERMINED IN THE FIELD AND INSTALLED PER NATIONAL, STATE AND LOCAL CODE REQUIREMENTS.


N. A CLEARLY LABELED MANUALLY OPERATED EMERGENCY SHUT-OFF SWITCH SHALL BE PROVIDED IN AN EASY ACCESS LOCATION WITHIN SEVENTY-FIVE (75) FEET OF, BUT NOT NEARER THAN TWENTY-FIVE (17) FEET TO ANY DISPENSER.

O. SIGNS IDENTIFYING THE EMERGENCY SHUT-OFF SWITCH SHALL BE LABELED EMERGENCY SHUT-OFF.

P. A FIRE EXTINGUISHER WITH A MINIMUM CLASSIFICATION OF 2A20BC SHALL BE PROVIDED AND SO LOCATED TO BE NOT MORE THAN SEVENTY-FIVE (75) FEET FROM ANY PUMP, DISPENSER, OR FILL-PIPE OPENING. LOCATE PER FIRE DEPARTMENT REQUIREMENTS.

FIELD VERIFICATION AND COORDINATION:
SUBMITTER SHALL BE RESPONSIBLE FOR SITE CONDITIONS ARE FROM SURVEY BY OTHERS. THE ARCHITECT BEARS NO RESPONSIBILITY FOR ACCURACY OF SAME.

2. EXISTING UTILITY LOCATION: THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION OF THE SIZE AND LOCATION OF ALL EXISTING UNDERGROUND AND ABOVE GROUND UTILITIES. EXISTING UTILITY SHOWN HAVE BEEN OBTAINED FROM AVAILABLE RECORDS AND ARE SHOWN FOR INFORMATION ONLY. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY ADDITIONAL UTILITY LOCATIONS NOT SHOWN. CARE SHOULD BE TAKEN TO AVOID DAMAGE OR DISTURBANCE TO EXISTING UTILITIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ANY DAMAGE TO THE UTILITY.

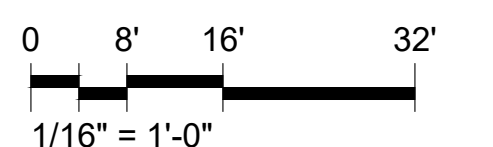

DOUGLAS E. BROOKBANK, ARCHITECT

[illegible]

98-4150-19
PM: AGNES VINCENT
DRAWN: AV
AUGUST 08, 2023

ENLARGED
FUEL
SITE PLAN

AG-1

JCGI NOTES:

- 1) SJ HAVE BEEN RELOCATED TO END OF ISLAND FORMS
- 2) SJ ADDED AT TANK SLAB NEED TO BE AT A MINIMUM OF 2' FROM MAN WAY LIDS TO AVOID SAW-CUTS IN CONCRETE CROWN AT MAN-WAYS
- 3) DIAGONAL CUTS HAVE BEEN ADDED TO ELIMINATE AS MANY DEAD-END SAW-CUTS AS POSSIBLE
- 4) WHERE SAW CUT MEET CURB LINE TOOLED JOINTS OR SAW-CUTS NEED TO CARRY THROUGH TO ELIMINATE CRACKING AT CURBS

NOTE:
FOR FUEL FACILITY SIGNAGE,
SEE TABLE ON AG-2

**TANK AND FUELING CONCRETE
SLABS NOTE:**
CJ - CONSTRUCTION JOINT,
SEE 16 / AG-6
SJ - SAW-CUT SHRINKAGE JOINT,
SEE 17 / AG-6