



WINCHESTER RD.

AREA OF WORK

HACK'S CROSS RD.

0 20' 40' 80'

1" = 40'-0"

TSG-1	TITLE SHEET
C1.0	COVER
C2.0	SURVEY
C3.0	SITE DEMOLITION PLAN
C4.0	OVERALL LAYOUT PLAN
C4.1	SITE LAYOUT PLAN
C5.0	DETAILED UTILITY PLAN
C6.0	DETAILED GRADING PLAN
C6.1	DETAILED GRADING PLAN
C8.2	PROFILES
C7.0	INITIAL EROSION CONTROL PLAN
C7.1	INTERMEDIATE AND FINAL EROSION CONTROL PLAN
D1.0	CONSTRUCTION DETAILS
D1.1	CONSTRUCTION DETAILS
D1.2	CONSTRUCTION DETAILS
L1.0	TREE REPLACEMENT PLAN I
L1.1	TREE REPLACEMENT PLAN II
SE-1	SITE ELECTRICAL
DAG-1	DEMOLITION SITE PLAN
AG-1	ENLARGED SITE PLAN
AG-2	CANOPY ELEVATIONS AND SECTIONS
AG-4	CANOPY REFLECTED CEILING PLAN
AG-5	CONTROLLED ENCLOSURE PLANS, ELEVATIONS AND DETAILS
AG-6	SITE DETAILS
S-1.0	CANOPY SPECIAL INSPECTIONS AND GENERAL NOTES
S-1.1	CANOPY FOUNDATION PLAN
S-1.2	CANOPY FOUNDATION DETAILS
S-2.0	CANOPY ROOF FRAMING PLAN
S-2.1	CANOPY ROOF FRAMING DETAILS

OWNER

COSTCO WHOLESALE CORPORATION
730 LAKE DRIVE
ISSAQUAH, WA 98027
t. 425.315.8100

ARCHITECT

M52 CORPORATION
8444 WESTPARK DRIVE, SUITE 120
MCLEAN, VA 22102
t. 703.564.8406
t. 703.564.8400
PROJECT MANAGER: AGNES VINCENT

**CIVIL ENGINEER
AND SURVEYOR**

AEC
50 WARM SPRINGS CIRCLE
SUITE 110
ROSWELL, GA 30075
t. 678.990.2408

**GEOTECHNICAL
ENGINEER**

TERRACON CONSULTANTS, INC.
4040 ROYAL DRIVE, SUITE 100
KENNESAW, GA 30144
t. 770.623.0755

**LANDSCAPE
ARCHITECT**

AEC
50 WARM SPRINGS CIRCLE
SUITE 110
ROSWELL, GA 30075
t. 678.990.2408

**STRUCTURAL
ENGINEER**

GMA
7337 N. FIRST ST., SUITE 110
TUESDAY, CA 95720
t. 559.435.1411
t. 559.435.1169

**TANK/
ELECTRICAL/
ENGINEER**

BARGHAUSEN CONSULTING ENGINEERS, INC.
18215 72ND AVENUE SOUTH
KENT, WA 98032
t. 425.251.6222
t. 425.251.8782

GOVERNING BUILDING CODE:	2021 INTERNATIONAL BUILDING CODE W/ LOCAL AMENDMENTS
	2021 INTERNATIONAL MECHANICAL CODE W/ LOCAL AMENDMENTS
	2021 FUEL GAS CODE W/ LOCAL AMENDMENTS
	2020 NATIONAL ELECTRIC CODE W/ TENN. AMENDMENTS
	2021 INTERNATIONAL PLUMBING CODE W/ LOCAL AMENDMENTS
	2021 INTERNATIONAL ENERGY CONSERVATION CODE W/ LOCAL AMENDMENTS


DOUGLAS E. BROOKBANK, ARCHITECT

OCCUPANCY GROUP: M
CONSTRUCTION TYPE: II B (NOT RATED)
FUEL CANOPY AREA: 4,576 SQ FT
FUEL CANOPY HEIGHT: 17'-6" TO TOP OF CANOPY

FOR ADDITIONAL ABBREVIATIONS:
SEE OTHER DESIGN DISCIPLINES

ADJ	ADJUSTABLE, ADJACENT	E	EXISTING	MTL	METAL	REQD	REQUIRED
ALUM	ALUMINUM	ENCL	ENCLOSURE	MFG	MANUFACTURING	SCHED	SCHEDULE
APPROX	APPROXIMATE	EQUAL	EQUAL	MANUFACTURER	SHEET	SHEET	SHEET
BD	BOARD	ETC	ET CETERA	MH	MANHOLE	SIM	SIMILAR
BLDG	BUILDING	EXH	EXHAUST	MIN	MINIMUM	SIO	SUPPLIED & INSTALLED BY OWNER
BLK	BLOCK	EXIST	EXISTING	MIS	MISCELLANEOUS	SUPPL	SUPPLIED & INSTALLED BY VENDOR
BLKG	BLOCKING	EXP	EXPANSION	MR	MOISTURE RESISTANT	SJ	SAW-CUT JOINT
BM	BEAM	EXT	EXTERIOR	MTD	MOUNTED	SOC	SUPPLIED BY OWNER & INSTALLED BY CONTRACTOR
BTWN	BETWEEN	FD	FLOOR DRAIN	MOUNTING	MOUNTING	SPEC'D	SPECIFIED
CB	CATCH BASIN	FF	FINISHED FLOOR	NIC	NOT IN CONTRACT	SQ	SQUARE
CI	CAST IRON	FL	FLOOR	NOM	NOMINAL	SS	SANITARY SEWER
CJ	CAST IN PLACE	FIN	FINISH	NTS	NOT TO SCALE	STD	STANDARD
CL	CONSTRUCTION JOINT	FT	FEET	OA	OVERALL	STL	STEEL
CLP	CENTER LINE	FTG	FOOTING	OC	ON CENTER	STRUCT	STRUCTURE, STRUCTURAL
CM	CLEAR	GA	GAUGE	OH	OVERHEAD	SYSTEM	SYSTEM
CMU	CONCRETE MASONRY UNIT	GC	GENERAL CONTRACTOR	OPER	OPERATION	T & E	TANK & ELECTRICAL
COL	COLUMN	HC	HANDICAPPED	OPG	OPENING	TCM	TOP OF MASONRY
CONC	CONCRETE	HORIZ	HORIZONTAL	OPP	OPPOSITE	TOP	TOP OF FLOOR
CONT	CONTINUOUS	HT	HEIGHT	PVC	POLY VINYL CHLORIDE	TS	TUBE STEEL
CONSTR	CONSTRUCTION	HTR	HEATER	PL	PLATE, PROPERTY LINE	TP	TYPE TYPICAL
COOR	CORPORATION	IBC	INTERNATIONAL BLDG CODE	PROJ	PROJECT	UNITED	UNITED LABORATORIES
DBL	DOUBLE	INSUL	INSULATION	PRV	PRESSURE REDUCING VALVE	UTIL	UTILITY
DIA	DIAMETER	INT	INTERIOR	PT	POINT	UNL	UNLESS NOTED OTHERWISE
DIM	DIMENSION	JT/JTS	JOINT, JOINTS	QTR	QUARTER	UNSHED	UNSHED
DTL	DETAIL	LCD	LIQUID CRYSTAL DISPLAY	R	RADIUS	VERT	VERTICAL
DS	DOWNSPOUT	LF	LINEAR FOOT, LINEAL FOOT	RCP	REFLECTED CEILING LIQUID	VF	VERIFY IN FIELD
DWG	DRAWING	LQ	LIQUID	RD	ROOF DRAIN	WHSE	WAREHOUSE
EA	EACH	MAS	MASONRY	RF	ROLLED FORMED	W	WIDTH
ELEC	ELECTRICAL	MAX	MAXIMUM	RL	RAIN LEADER	W	WITH
ELEV	ELEVATION	MBS	METAL BUILDING SUPPLIER	RECD	RECEIVED	W/O	WITHOUT
		MECH	MECHANICAL	REINF	REINFORCING	W/DW	WINDOW
						WP	WATERPROOF
						WR	WATER RESISTANT


SYMBOLS

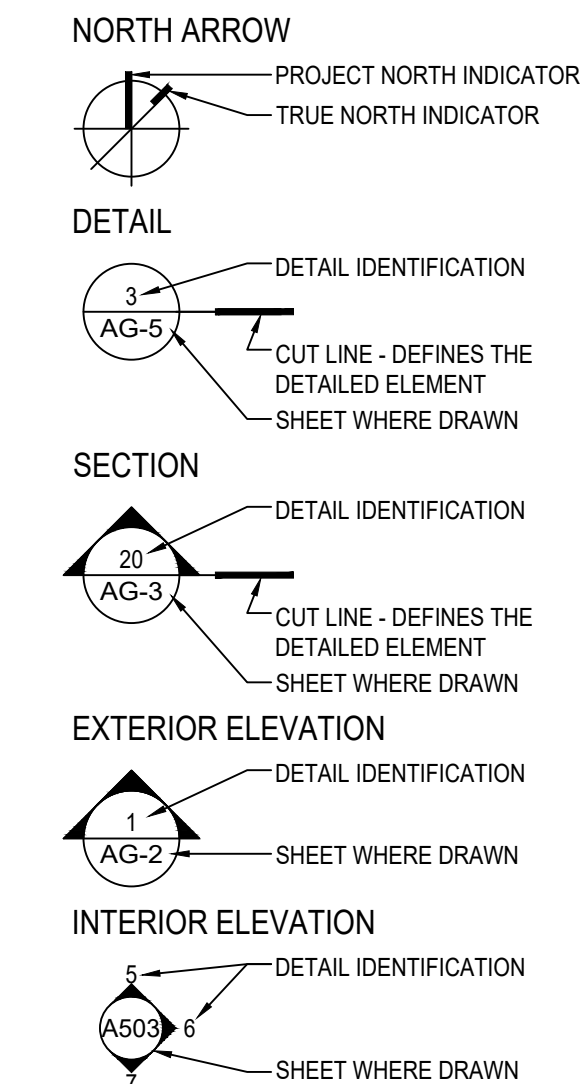


011 — EQUIPMENT NUMBER -
REFER TO SCHEDULE



WORK, CONTROL OR DATUM POINT




SLOPE DIRECTION WITH DATUM MARK



PER FOOT
PROPERTY LINE



FENCE





2



 CONCRETE
 EARTH
 GRAVEL
 CMU OR BRICK
 STEEL

THE FOLLOWING DESCRIBED REAL PROPERTY IS SITUATED IN THE CITY OF S.E. MEMPHIS,
SHELBY COUNTY, STATE OF TENNESSEE.

1. ZONING:	PLANNED DEVELOPMENT
2. SETBACKS:	REQUIRED
FRONT:	24 FT
REAR:	NONE
SIDE:	20 FT
3. SITE AREA:	14.24 ACRES (820,460 S.F.)
4. LOT COVERAGE ALLOWED:	100%
5. LANDSCAPING REQUIRED:	YES, SEE CIVIL
6. EXISTING BUILDING AREA:	
BUILDING FOOTPRINT AREA:	149,448 SQ FT
7. PARKING REQUIRED:	
1/300 SQ FT x 149,448 SQ FT TOTAL = 498 PARKING SPACES REQ'D	
8. PARKING PROVIDED:	
EXISTING PARKING:	709 STALLS
DELETED PARKING:	36 STALLS
TOTAL:	683 STALLS
PARKING RATIO:	683 STALLS (15 ACCESSIBLE STALLS) 1/300 SQ FT

FUELING FACILITY EXPANSION:

THE SCOPE OF WORK INCLUDES ADDING THREE (3) NEW ISLANDS WITH ONE DOUBLE SIDED FUEL DISPENSER EACH; ALLOWING FOR SIX (6) ADDITIONAL AUTOMOBILE FUELING POSITIONS, REMOVING AND REPLACING THE EXISTING (6) DISPENSERS, ENLARGING THE EXISTING CANOPY BY 1,696 SQUARE FEET, AND CURBS, CONCRETE, ASPHALT AND LANDSCAPE REVISIONS. THE EXISTING CONTROLLER ENCLOSURE WILL BE DEMOLISHED AND A NEW ONE WILL BE PROVIDED.

THE NINE (9) NEW DISPENSERS WILL BE INTEGRATED INTO THE COMPUTERIZED CONTROLLER, WHICH RUNS THE PAYMENT, PUMPING AND MONITORING SYSTEMS. FUEL IS STORED IN THREE (3) EXISTING DOUBLE WALLED, FIBERGLASS UNDERGROUND STORAGE TANKS.

THE NEW CONTROL / MONITORING SYSTEM WILL INCLUDE AN ALARM TIED INTO THE OWNER'S CONTRACTED 24 HOUR MONITORING SERVICE COMPANY. THE CONTINUOUS LEAK DETECTION SYSTEM WILL AUTOMATICALLY CHECK FOR FUEL LEAKS AND AUTOMATICALLY WILL STOP THE FLOW OF GASOLINE IN THE EVENT OF AN ALARM CONDITION.

MG2. All rights reserved. No part of this document may be reproduced in any form or by any means without permission in writing from MG2.

[illegible]

B-4150-19

M: AGNES VINCENT

RAWN: AV
AUGUST 08, 2023


00001 00, E020

FILE QUEST

TITLE SHEET

TSG-1

13G-1

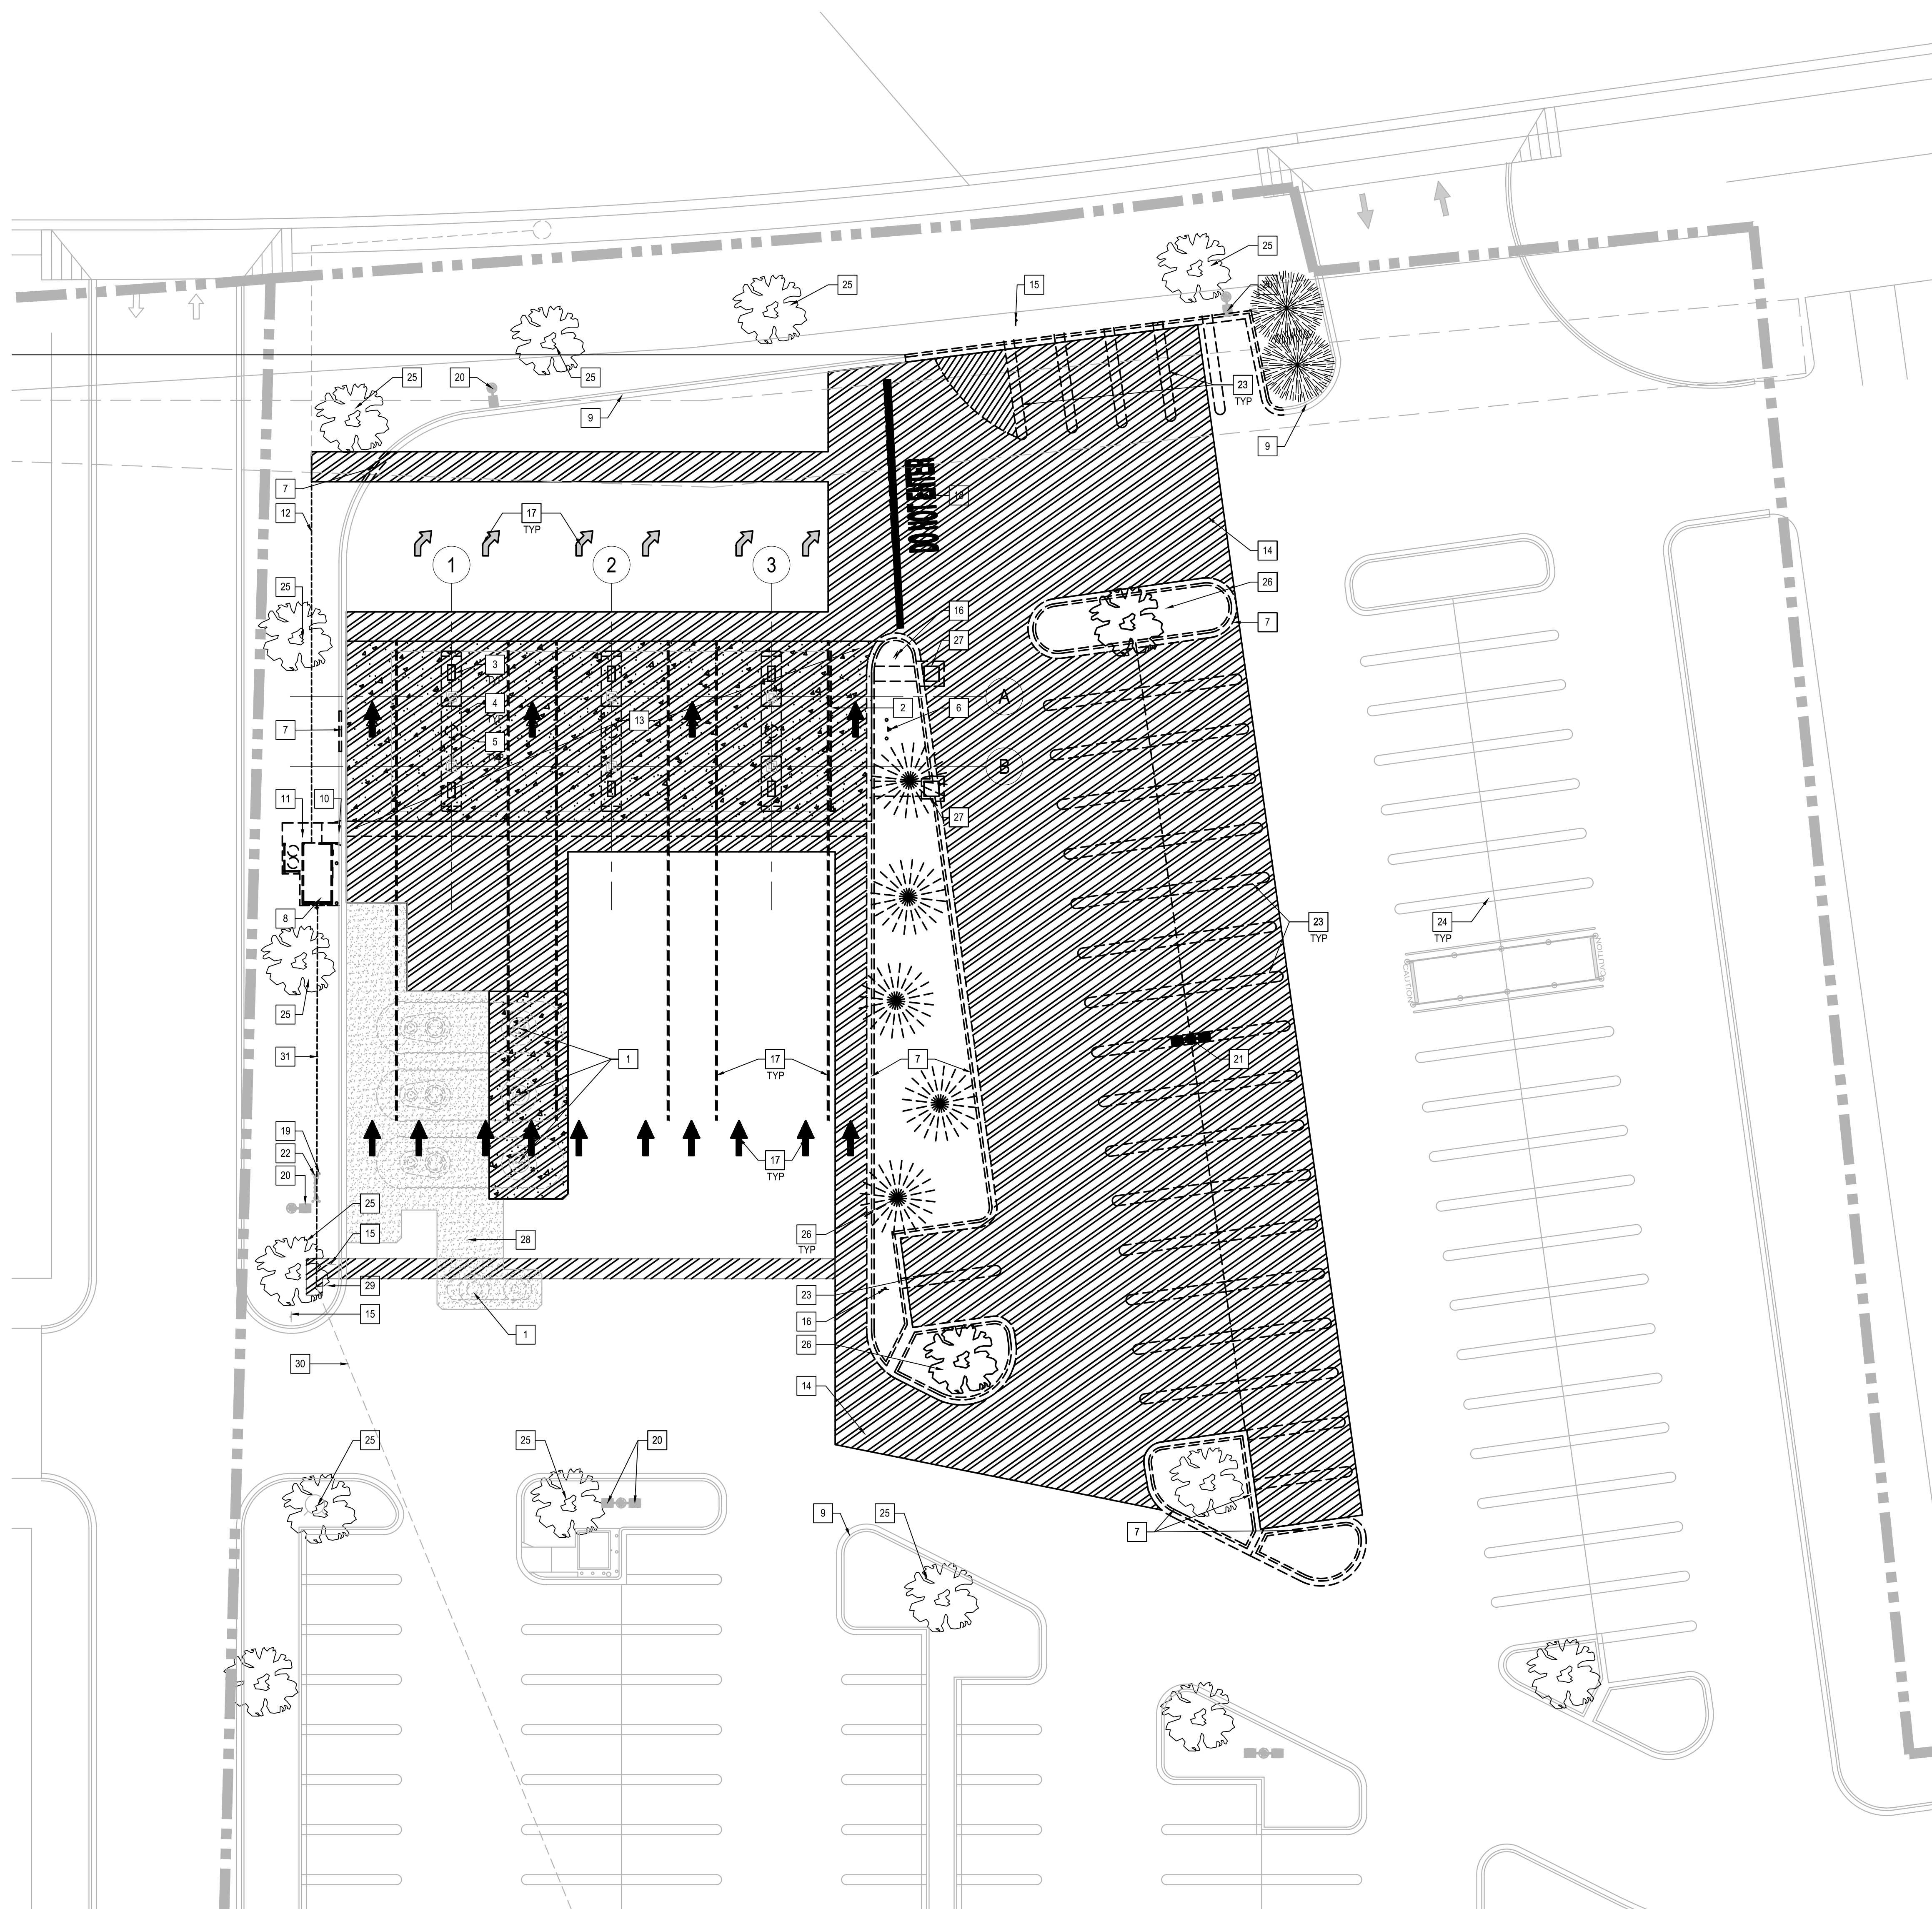

1	EXISTING UNDERGROUND STORAGE TANKS TO REMAIN
2	DEMO AND PREP EXISTING FUEL CANOPY ON THE EAST SIDE FOR EXPANSION.
3	EXISTING MULTI-PRODUCT DISPENSER TO BE REPLACED.
4	EXISTING CONCRETE DISPENSER ISLAND TO BE DEMOLISHED.
5	EXISTING WASTE RECEPTOR TO BE REMOVED AND RETAINED FOR RE-INSTALLATION.
6	EXISTING EMERGENCY SHUT OFF SWITCH TO BE REMOVED
7	EXISTING CURB AND GUTTER TO BE REMOVED.
8	EXISTING CONTROLLER ENCLOSURE AND ASSOCIATED EQUIPMENT TO BE DEMOLISHED / REMOVED
9	EXISTING CURB TO REMAIN
10	EXISTING CURB TO BE REMOVED
11	EXISTING CONCRETE WALKWAY TO BE REMOVED
12	EXISTING CONDUIT WIRES TO BE TERMINATED AND CAPPED.
13	REMOVE AND REPLACE EXISTING CONCRETE SLAB.
14	LIMITS OF DISTURBANCE: REMOVE AND REPLACE EXISTING ASPHALT AS NEEDED FOR NEW PIPING
15	EXISTING STOP SIGN TO BE REMOVED.
16	EXISTING STOP SIGN TO BE RELOCATED.
17	REMOVE EXISTING PAINT STRIPING.
18	EXISTING PAINTED "DO NOT ENTER" SIGN TO BE REMOVED
19	EXISTING BOLLARD TO REMAIN
20	EXISTING LIGHT POLE & LIGHTS TO REMAIN
21	EXISTING LIGHT POLE & LIGHTS TO BE REMOVED
22	EXISTING VENT RISER TO REMAIN
23	EXISTING PARKING STALLS TO BE REMOVED
24	EXISTING PARKING STALLS TO REMAIN
25	EXISTING TREE TO REMAIN
26	EXISTING TREE TO BE REMOVED
27	EXISTING METAL COVER TO BE REMOVED
28	EXISTING CONDUIT TO REMAIN
29	NEW COMMUNICATION CONDUIT PULL BOX - GC TO VERIFY IN FIELD OR INSTALL NEW ONE
30	EXISTING COMMUNICATION CONDUIT TO WAREHOUSE TO REMAIN - GC TO VERIFY IN FIELD
31	EXISTING COMMUNICATION CONDUIT TO BE REMOVED

 EXTENT OF CONCRETE TO BE REMOVED AS NEEDED FOR NEW PRODUCT PIPING
 FULL DEPTH PAVEMENT TO BE REMOVED
 EXISTING CONCRETE TO REMAIN

- THE BUILDING WILL BE OCCUPIED AND IN FULL USE BY THE OWNER DURING CONSTRUCTION
1. CONSTRUCTION THAT MAY AFFECT THE PUBLIC SHALL BE DONE DURING OFF-HOURS
2. AREAS OF DEMOLITION SHALL INCLUDE, BUT ARE NOT LIMITED TO ANY STRUCTURAL, MECHANICAL, ELECTRICAL, PIPING, PLUMBING, AND/OR FINISHES. THE CONTRACTOR SHALL COMPLETE THE DEMOLITION WORK. THE CONTRACTOR IS TO REMOVE ALL WALLS, BOLLARDS, REBAR, STEEL, PLUMBING, ELECTRICAL, RAISED CONCRETE SLAB, CURBS, REBARS, ETC. ASSOCIATED WITH DEMOLITION OF AREAS SHOWN.
3. DEMOLITION ITEMS NOT ALLOWED FOR REUSE SHALL BE OFFERED IN GOOD CONDITION TO THE OWNER. DURING THE BIDDING PERIOD, COORDINATE AND VERIFY WITH THE OWNER AS TO WHICH ITEMS ARE TO BE SALVAGED.
4. DO NOT INTERRUPT ANY ELECTRICAL, PLUMBING, FIRE SPRINKLER, ETC. WITHOUT PRIOR WRITTEN APPROVAL OF THE OWNER.
5. PROVIDE AND MAINTAIN EGRESS PATHS THROUGHOUT CONSTRUCTION INCLUDING, BUT NOT LIMITED TO EXIT SIGNS, EMERGENCY EXIT LIGHTS, AND EGRESS MARKING. THE WORK AREA PRIOR TO CLOSING ANY EGRESS OPENINGS AND/OR EGRESS PATHS DURING DEMOLITION/CONSTRUCTION.
6. THE CONTRACTOR SHALL LOCATE ALL EXISTING UNDERGROUND UTILITIES WITHIN PROXIMITY TO THE WORK AREA PRIOR TO EXCAVATION.
7. EXISTING UTILITIES SHOWN HAVE BEEN OBTAINED FROM AVAILABLE RECORDS AND ARE SHOWN FOR CONVENIENCE ONLY. VERIFY ALL INVERT ELEVATIONS AT POINTS OF CONNECTIONS OF NEW UTILITIES TO EXISTING UTILITIES. STATE WORK AREA.
8. PROVIDE TEMPORARY DUST PARTITIONS AS NECESSARY TO PREVENT DUST AND DEBRIS FROM SETTLING ON ADJACENT AREAS NOT UNDER CONSTRUCTION. REVIEW WITH AND OBTAIN OWNER APPROVAL FOR FLOOR LOCATIONS.
9. ALL UTILITIES AND PIPES BELOW THE FLOOR AS REQUIRED. CONTRACTOR IS RESPONSIBLE FOR FLOOR PATCHING.
10. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING OR REPLACING ITEMS DAMAGED DURING DEMOLITION AND CONSTRUCTION.
11. WHEN CUTTING AND PATCHING, THE CONTRACTOR SHALL USE METHODS LEAST LIKELY TO DAMAGE ELEMENTS RETAINED OR ADJOINING SURFACES. CUT HOLES AND SLOTS AS SMALL AS POSSIBLE, NEATLY, TO SIZE REQUIRED AND WITH MINIMUM DISTURBANCES OF ADJACENT MATERIALS.
12. WHERE EXISTING CONSTRUCTION IS REMOVED, CUT OR OTHERWISE INTERRUPTED, PATCH TO MATCH THE EXISTING ADJACENT SURFACES. SEAMS TO BE AS INVISIBLE AS PRACTICAL. REFINISHES SHALL BE MATCHED TO THE NEAREST VISUAL BREAK LINES SUCH AS CORNERS, CEILING LINES, TOP OF BASE, ETC.
13. WHERE NEW WORK ABUTS OR ALIGNS WITH EXISTING, PERFORM A SMOOTH AND EVEN TRANSITION. PATCHED WORK TO MATCH EXISTING ADJACENT WORK IN TEXTURE AND APPEARANCE.
14. REMOVE AND REPLACE AREAS, SURFACES OR ITEMS THAT CANNOT BE SATISFACTORILY REPAIRED.
15. AS A MINIMUM, THE LEVEL OF WORKSHIP SHOULD MATCH THE GENERAL LEVEL OF EXISTING WORKSHIP.
16. UNLESS SHOWN ON THE DRAWINGS OTHERWISE, DO NOT SUPPORT OR SUSPEND ITEMS, EQUIPMENT, HANGERS, ETC. FROM EXISTING STRUCTURAL MEMBERS (BEAMS, TRUSSES, JOIST, ETC.) WITHOUT WRITTEN APPROVAL OF A LICENSED STRUCTURAL ENGINEER.
17. DO NOT CUT OR DRILL ANY STRUCTURAL MEMBER (PARTICULARLY ROOF JOIST) WITHOUT WRITTEN APPROVAL OF A LICENSED STRUCTURAL ENGINEER.
18. SHORING OF STRUCTURAL FOUNDATIONS, STRUCTURES, AND/OR TRENCING REQUIRED TO COMPLETE THE WORK DESCRIBED IN THE DOCUMENTS IS CONSIDERED A MEANS, METHOD OR TECHNIQUE AND IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
19. THE CONTRACTOR MAY REQUIRE A LICENSED ENGINEER TO SUPERVISE, APPROVE, AND/OR PROVIDE DRAWINGS FOR STRUCTURAL FOUNDATIONS, STRUCTURES, AND/OR TRENCING. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE WITH THE ENGINEER DIRECTLY AND NOT THROUGH THE OWNER.
20. ALL SYSTEMS AND SERVICES ARE TO BE LEFT OPERATIONAL PRIOR TO THE END OF EACH WORKDAY.
21. THE CONTRACTOR SHALL REMOVE ALL RUBBLE AND DEBRIS FROM THE JOBSITE DAILY AND LEAVE THE BUILDING AND GROUNDS BROOM CLEAN UPON COMPLETION OF THE WORK.

OPERATIONAL PHASING NOTES

1. THE CONTRACTOR TO SUBMIT PHASING PLAN AT BID. THE CONTRACTOR SHALL CONFIRM THE OPERATIONAL PHASING WITH THE OWNER PRIOR TO STARTING CONSTRUCTION.
2. THE PHASING SHOWN IS NOT INTENDED TO REPRESENT OR DICTATE CONSTRUCTION SEQUENCE OR MEANS. MEANS SHALL BE DETERMINED BY THE CONTRACTOR.
3. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL CONSTRUCTION PHASING SO AS NOT TO IMPACT THE OPERATIONS.
4. REMOVE WALLS, BOLASTERS, BRACINGS, ELECTRICAL, ETC. AND CAP UTILITIES BELOW THE FLOOR AS REQUIRED TO ACHIEVE THE OPERATIONAL.
5. PROVIDE TEMPORARY UTILITIES AS REQUIRED DURING PHASING.
6. REMOVE WALLS, BOLASTERS, BRACINGS, ELECTRICAL, ETC. AND COVERING OF THE EXISTING EXTERIOR SIGNAGE. THE CONTRACTOR SHALL PROVIDE A TEMPORARY "COSTCO WHOLESALE" SIGNAGE (OR SIZE COMPARABLE TO EXISTING SIGN) UNTIL PERMANENT SIGN IS INSTALLED.
7. THE CONTRACTOR SHALL PROVIDE TEMPORARY LIGHTING TO PROVIDE ILLUMINATION FOR THE PHASING. CONFIRM LOCATIONS WITH THE OWNER.



SE MEMPHIS, TN
#353

3771 HACKS CROSS ROAD
MEMPHIS, TN 38125


COSTCO
WHOLESALE
CORPORATION

730 LAKE DRIVE
ISSAQUAH, WA 98027
T: 425.313.8100
www.costco.com

8444 Westpark Dr, Ste 120
McLean, VA 22102
703 564 8484
MG2.com



ISSUE FOR
BID



DOUGLAS E. BROOKBANK, ARCHITECT


© MG2. All rights reserved. No part of this document may be reproduced in any form or by any means without permission in writing from MG2.

DATE	DESCRIPTION
02/22/24	PERMIT SET
03/05/24	ISSUE FOR BID

96-4150-19
PM: AGNES VINCENT
DRAWN: AV
AUGUST 8, 2023

CANOPY
REFLECTED
CEILING PLAN

AG-4

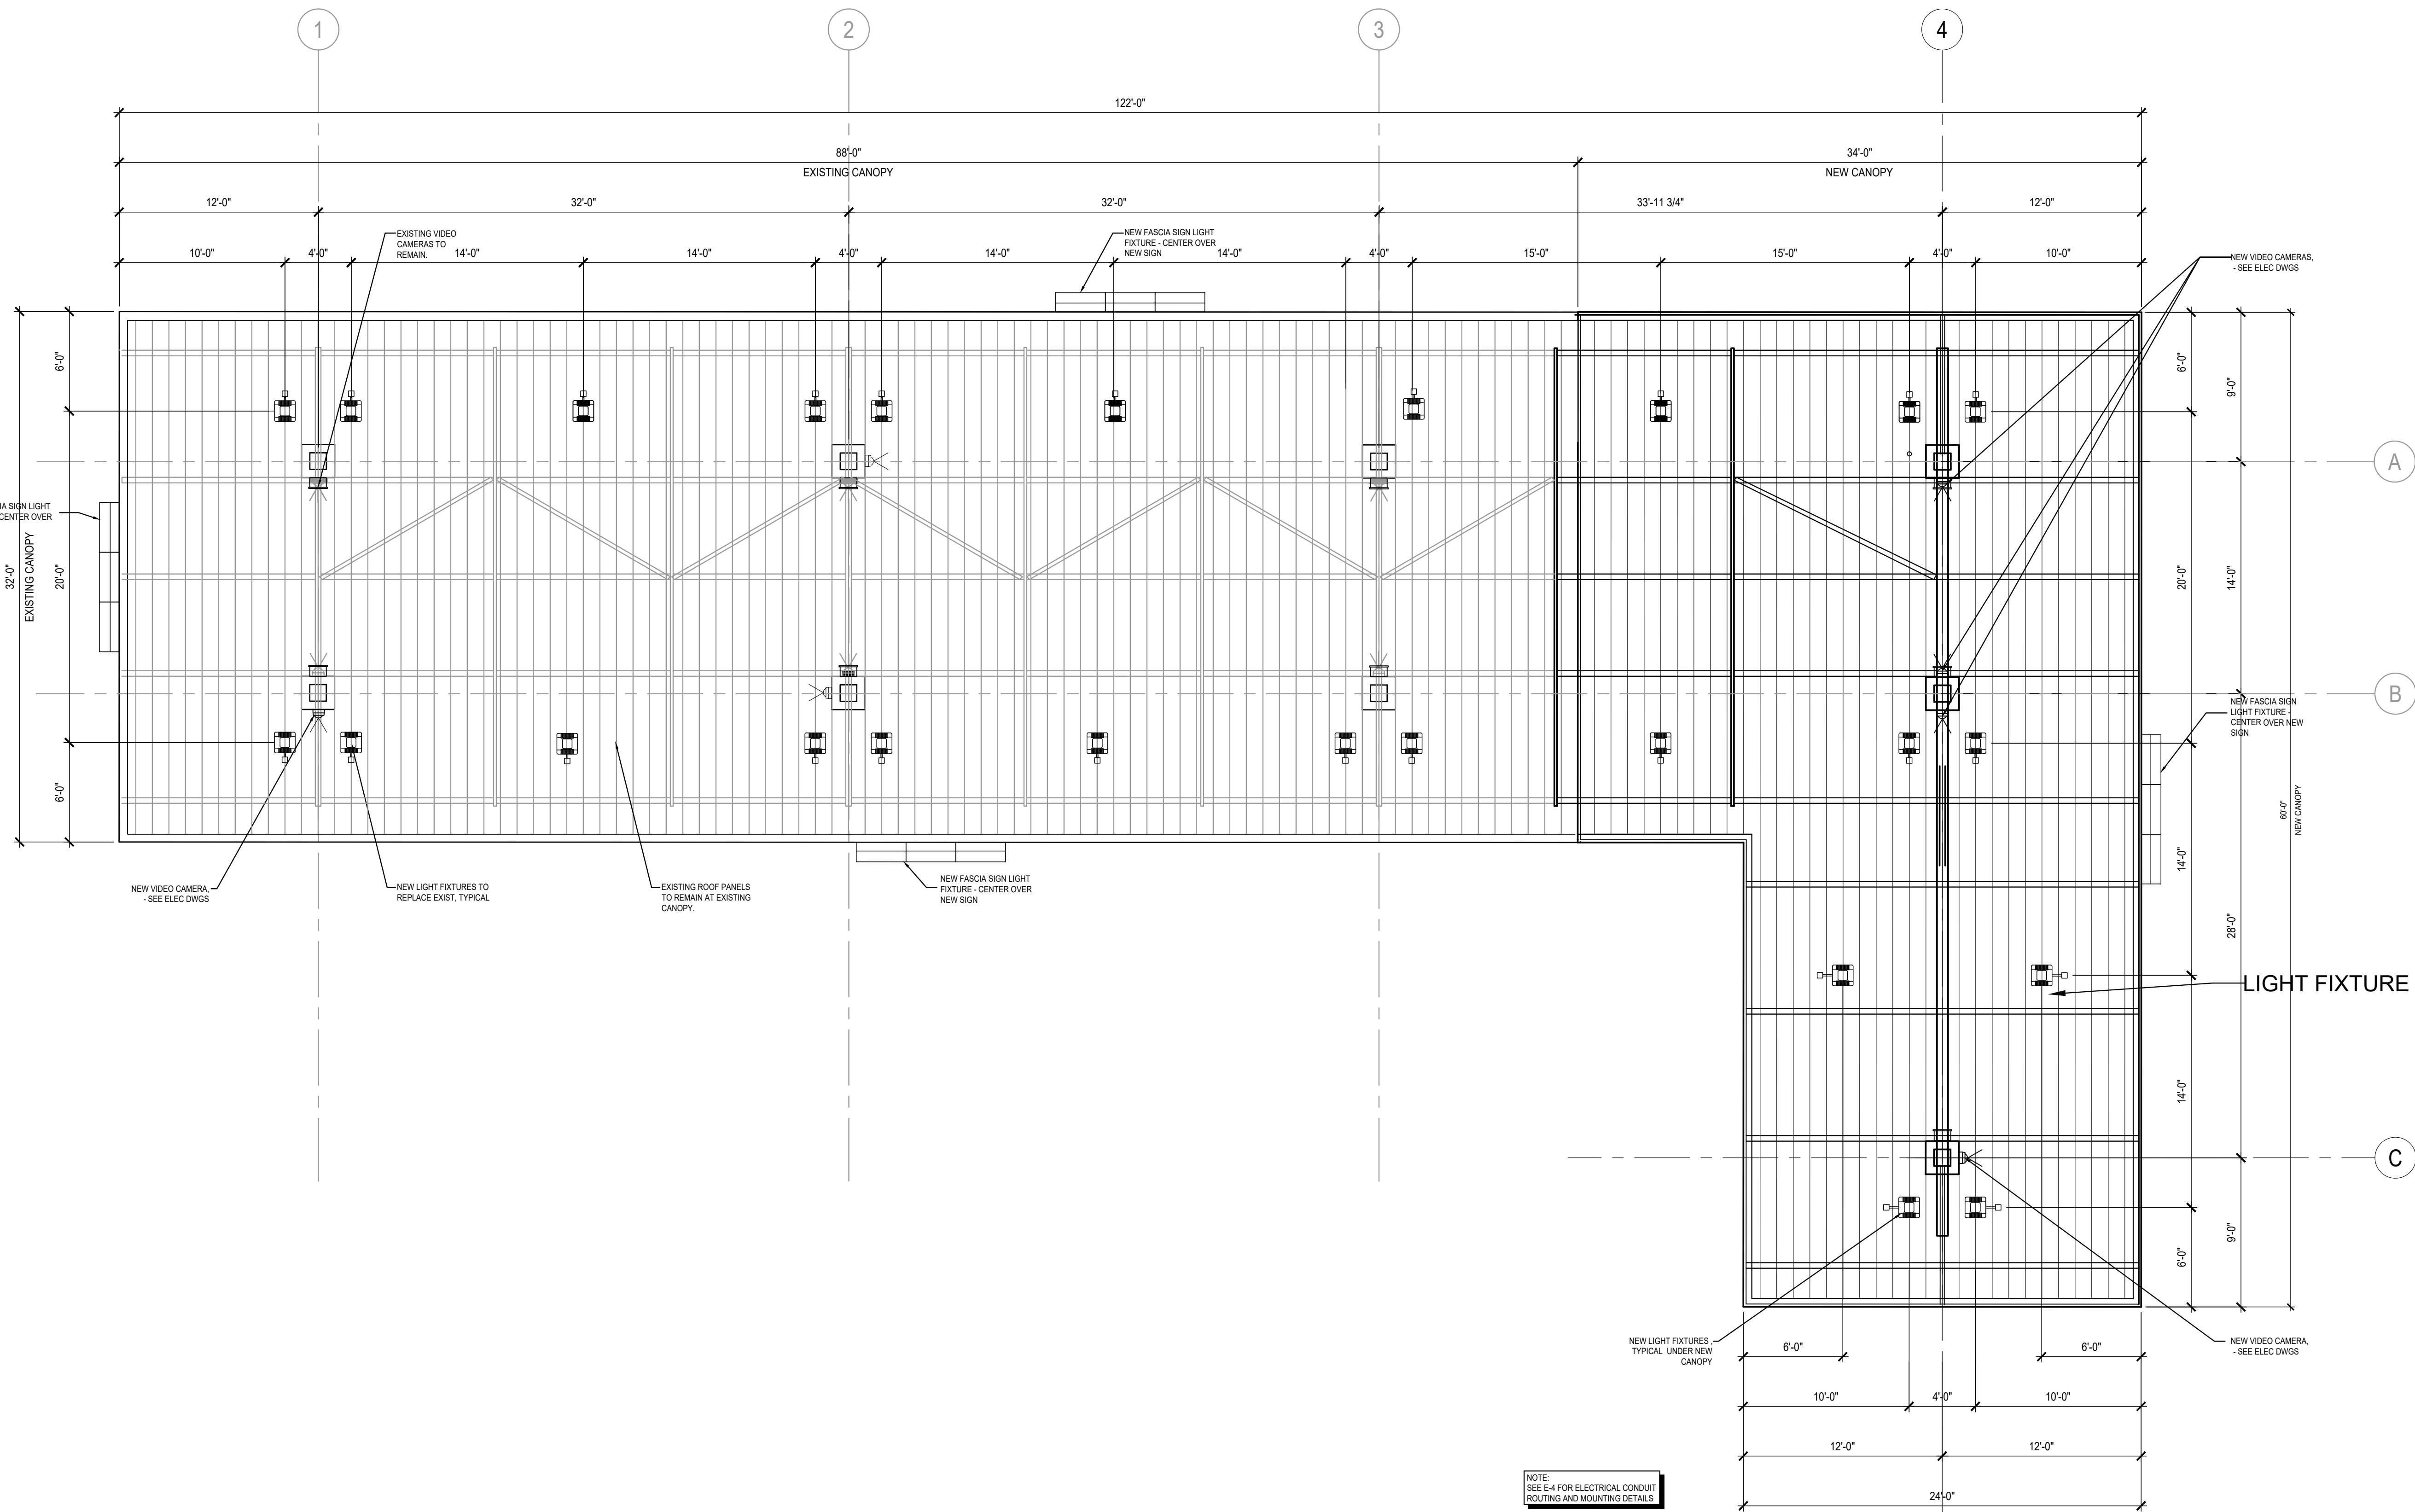

LEGEND

LED LIGHT FIXTURE (SOIC) - SEE ELEC DWGS

LED LIGHT FIXTURE, SECURITY (SOIC) - SEE ELEC DWGS

VIDEO CAMERA (SIO) - SEE ELEC DWGS

REFLECTED CEILING PLAN NOTES:

EXISTING CANOPY LIGHTS TO BE REMOVED AND REPLACED WITH NEW LIGHTS.

EXISTING FASCIA SIGN LIGHT FIXTURE TO BE REMOVED AND REPLACED WITH NEW FIXTURE

REFER ELECTRICAL DRAWINGS FOR EXACT LOCATION AND TYPE OF ELECTRICAL FIXTURES.

96-4150-19
PM: AGNES VINCENT
DRAWN: AV
AUGUST 8, 2023
PLOTTED BY: AGNES VINCENT DATE/TIME: 8/14/2024 2:32 PM FILE: P:\COSTCO\96-4150-19 SE MEMPHIS, TN - GAS EXPANSION\07_CAD\03_CONST\DWGS\96-4150-19-AG-4.DWG