





730 LAKE DRIVE
ISSAQUAH, WA 98027
T: 425.313.8100
www.costco.com

703 564 8484
MG2.com



SCALE: 1-1/2" = 1'-0"



98-4150-19
PM: AGNES VINCENT
DRAWN: AV
AUGUST 8, 2023

CANOPY ELEVATIONS AND SECTIONS

AG-2



1	EXISTING UNDERGROUND STORAGE TANKS
2A	EXISTING FUEL CANOPY
2B	NEW FUEL CANOPY EXPANSION
3	NEW ACCESSIBLE MULTI-PRODUCT DISPENSER - SEE DETAILS T-6
4	NEW CONCRETE DISPENSER ISLAND
5A	REINSTALL EXISTING WASTE RECEPTOR
5B	WASTE RECEPTOR, BOLTED DOWN, COMMERCIAL ZONE, 33 US GALLON ROUND, #72Z01, BLACK-BY GC
6	FIRE EXTINGUISHER, QUANTITY AS SHOWN ON PLAN, MOUNTED ON COLUMN SIDE FACING FUEL DISPENSER - FIRE EXTINGUISHER CABINET TO BE BROOKS MODEL # MARK II, RED, CABINET WITH CLEAR COVER (OR EQUAL) - FIRE EXTINGUISHER AND CABINET SUPPLIED BY CONTRACTOR
7	NEW EMERGENCY SHUT OFF SWITCH
8	PRE-FABRICATED PRE-ENGINEERED NEW CONTROLLER ENCLOSURE: SEE AG-5A
9A	EXISTING CONCRETE CURB
9B	NEW CONCRETE CURB
10A	EXISTING CONCRETE SLAB
10B	NEW CONCRETE SLAB - SEE AG-6, STRUCTURAL TANK AND CIVIL DRAWINGS
10C	NEW HEAVY DUTY ASPHALT: SEE CIVIL
11	PROPOSED CONCRETE SWALE - SEE CIVIL
12	EXISTING VENT STACK TO REMAIN
13	EXISTING SITE LIGHT TO REMAIN.
14	NEW SITE AREA LIGHT
15	NEW BOLLARD - SEE DETAIL 14A / AG-6
16	NEW "STOP" AND "DO NOT ENTER" SIGN - SEE DETAIL 8 / AG-6
17	RELOCATED EXISTING "STOP" SIGN AND ADD DO NOT ENTER SIGN.
18	EXISTING BOLLARDS
19	NEW PAINTED TRAFFIC CONTROL STRIPING - SEE DETAIL 2 / AG-6
20	NEW PAINTED "DO NOT ENTER" SIGN - SEE DETAIL 13 / AG-6
21	NEW PAINTED "STOP" / BAR - SEE DETAIL 13 / AG-6
22	NEW PAINTED TRAFFIC ARROW - SEE DETAIL 4 / AG-6
23	EXISTING "MEMBERS ONLY" SIGN
24	NEW "MEMBERS ONLY" SIGN - SEE DETAIL 9 / AG-6
25	NEW DRAIN INLET - SEE CIVIL
26	SPEED BUMP - SEE DETAIL 1 / AG-6
27	CONTROL JOINT AT END OF ISLANDS - SEE 18 / AG-6
28	NEW "IN CASE OF FIRE OR SPILL" SIGNAGE ON FOUR SIDES - SEE AG-2, 11/AG-6
29	NEW "NO SMOKING / STOP ENGINE" SIGNAGE ON TWO SIDES- SEE AG-2, 11/AG-6
30	NEW SPLICE BOX BY GC OR UTILITY CO.
31	NEW ELECTRICAL CONDUIT BY GC OR UTILITY CO.
32	NEW CONTAINMENT SUMP: SEE T1-1
33	NEW TMS ADDITIVE CABINET - SEE 5 / AG-6
34	NEW VST GREEN MACHINE - SEE 10 / AG-6
35	NEW OVERFILL ALARM ON PEDESTAL - SEE 15 / AG-6
36	EXISTING PARKING STALLS
37	NEW PARKING STALLS
38	NEW LANDSCAPING - TO MATCH EXISTING ON SITE WHERE DISTURBED
39	NOT USED
40	EXISTING TREE
41	NEW OIL WATER SEPARATOR
42	REINSTALL EXISTING DISPENSER
43	NEW COMMUNICATION CONDUIT PULL BOX - GC TO VERIFY IN FIELD OR INSTALL NEW ONE
44	EXISTING COMMUNICATION CONDUIT TO WAREHOUSE - GC TO VERIFY IN FIELD
45	NEW COMMUNICATION CONDUIT TO CONTROLLER ENCLOSURE - BY GC OR UTILITY CO.

 PROPOSED CONCRETE SLAB
 PROPOSED ASPHALT SLURRY SEAL
 EXISTING CONCRETE

A. ALL WORK, MATERIALS, METHODS, ETC. SHALL CONFORM TO ALL GOVERNING BUILDING CODES, REGULATIONS AND AGENCIES.

B. PROVIDE PEDESTRIAN OR VEHICULAR PROTECTION BARRICADES, TEMPORARY GUARD RAILS AND ANCHOR CANSIES AS REQUIRED BY THE LOCAL AUTHORITIES OR AS NECESSARY FOR PEDESTRIAN AND VEHICULAR SAFETY.

C. THE DEVELOPER'S NAME, ADDRESS AND PHONE NUMBER TO BE CONSPICUOUSLY POSTED AT THE CONSTRUCTION SITE DURING ALL PHASES OF CONSTRUCTION.

D. ITEMS NOTED AS EXISTING TO REMAIN, CONTRACTOR SHALL REPAIR AND/OR REPLACE AT CONTRACTOR'S EXPENSE, ANY EXISTING FACILITIES TO REMAIN THAT ARE DAMAGED BY CONTRACTOR'S OPERATIONS.

E. ALL PAVING OR CONCRETE THAT IS DESTROYED OR REMOVED AS A RESULT OF CONSTRUCTION SHALL BE REPLACED OR PATCHED BY THE GC IN A MANNER THAT MATCHES OR IMPROVES THE CONDITION OF THE EXISTING PAVING OR CONCRETE. ALL PAVEMENT EXPOSED PRIOR TO INSTALLING ADJACENT PAVEMENT, DOWEL CONCRETE SURFACES WITH #4 DOWELS AT 18" OC.

F. VERIFY DIMENSIONS, LINES, GRADES, ELEVATIONS, AND SITE CONDITIONS PRIOR TO COMMENCING WORK. NOTIFY ARCHITECT PROJECT MANAGER IMMEDIATELY OF ANY DISCREPANCIES.

G. CONTRACTOR SHALL TAKE ADEQUATE PROTECTIVE MEASURES AND EXERCISE EXTREME CAUTION WHEN EXCAVATING OR DISTURBING EXISTING UNDERGROUND UTILITIES. ANY DAMAGE TO EXISTING UNDERGROUND UTILITIES SHALL BE REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE.

H. SEE CIVIL DRAWINGS FOR GRADING AND DRAINAGE INFORMATION. NO CLEAN-OUTS TO BE LOCATED IN THE UNDER CANOPY SLAB.

I. SEE LANDSCAPE DRAWINGS FOR PLANTING AND IRRIGATION INFORMATION.

J. SEE SHEET AG-2, AG-4 AND AG-6 FOR CANOPY ELEVATIONS, CANOPY REFLECTED CEILING PLAN, SIGN DETAILS, AND CANOPY MATERIALS.

K. SEE ELECTRICAL DRAWINGS FOR SITE ELECTRICAL.

L. ALL ELECTRICAL CONDUIT OR CABLE, WHERE SUBJECT TO VEHICULAR TRAFFIC SHALL BE A MINIMUM OF 16" COVER.

M. SEE TANK AND ELECTRICAL DRAWINGS FOR FUEL PIPING RUNS AND ELECTRICAL CONDUIT RUNS FOR UNDERGROUND STORAGE TANKS, DISTILLERS, LIGHT FIXTURES AND SECURITY CAMERAS. ALL UNDERGROUND PIPING AND ELECTRICAL SHALL BE PROTECTED. THE BEST CONNECTION ROUTE SHOULD BE DETERMINED IN THE FIELD AND INSTALLED PER NATIONAL, STATE AND LOCAL CODE REQUIREMENTS.


N. A CLEARLY LABELED MANUALLY OPERATED EMERGENCY SHUT-OFF SWITCH SHALL BE PROVIDED IN AN EASY ACCESS LOCATION WITHIN SEVENTY-FIVE (75) FEET OF, BUT NOT NEARER THAN TWENTY-FIVE (17) FEET TO ANY DISPENSER.

O. SIGNS IDENTIFYING THE EMERGENCY SHUT-OFF SWITCH SHALL BE LABELED EMERGENCY SHUT-OFF.

P. A FIRE EXTINGUISHER WITH A MINIMUM CLASSIFICATION OF 2A2BC: SHALL BE PROVIDED AND SO LOCATED TO NOT BE MORE THAN SEVENTY-FIVE (75) FEET FROM ANY PUMP, DISPENSER, OR FILL-PIPE OPENING. LOCATE PER FIRE DEPARTMENT REQUIREMENTS.

FIELD VERIFICATION AND COORDINATION:
SUBMITTER SHALL BE RESPONSIBLE FOR SITE CONDITIONS ARE BE RESPONSIVE BY OTHERS. THE ARCHITECT BEARS NO RESPONSIBILITY FOR ACCURACY OF SAME.

2. EXISTING UTILITY LOCATION: THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION OF THE SIZE AND LOCATION OF ALL EXISTING UNDERGROUND AND ABOVE GROUND UTILITIES. EXISTING UTILITY SHOWINGS HAVE BEEN OBTAINED FROM AVAILABLE RECORDS AND ARE SHOWN FOR INFORMATION ONLY. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY ADDITIONAL UTILITY LOCATIONS NOT SHOWN. CARE SHOULD BE TAKEN TO AVOID DAMAGE OR DISTURBANCE TO EXISTING UTILITIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ANY DAMAGE TO THE UTILITY.

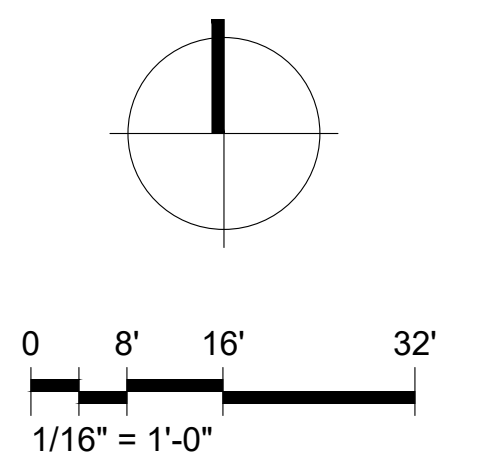

DOUGLAS E. BROOKBANK, ARCHITECT

[illegible]

98-4150-19
PM: AGNES VINCENT
DRAWN: AV
AUGUST 08, 2023

ENLARGED
FUEL
SITE PLAN


AG-1

JCGI NOTES:

- 1) SJ HAVE BEEN RELOCATED TO END OF ISLAND FORMS
- 2) SJ ADDED AT TANK SLAB NEED TO BE AT A MINIMUM OF 2' FROM MAN WAY LIDS TO AVOID SAW-CUTS IN CONCRETE CROWN AT MAN-WAYS
- 3) DIAGONAL CUTS HAVE BEEN ADDED TO ELIMINATE AS MANY DEAD-END SAW-CUTS AS POSSIBLE
- 4) WHERE SAW CUT MEET CURB LINE TOOLED JOINTS OR SAW-CUTS NEED TO CARRY THROUGH TO ELIMINATE CRACKING AT CURBS


NOTE:
FOR FUEL FACILITY SIGNAGE,
SEE TABLE ON AG-2

TANK AND FUELING CONCRETE
SLABS NOTE:
CJ - CONSTRUCTION JOINT,
SEE 16 / AG-6
SJ - SAW-CUT SHRINKAGE JOINT,
SEE 17 / AG-6

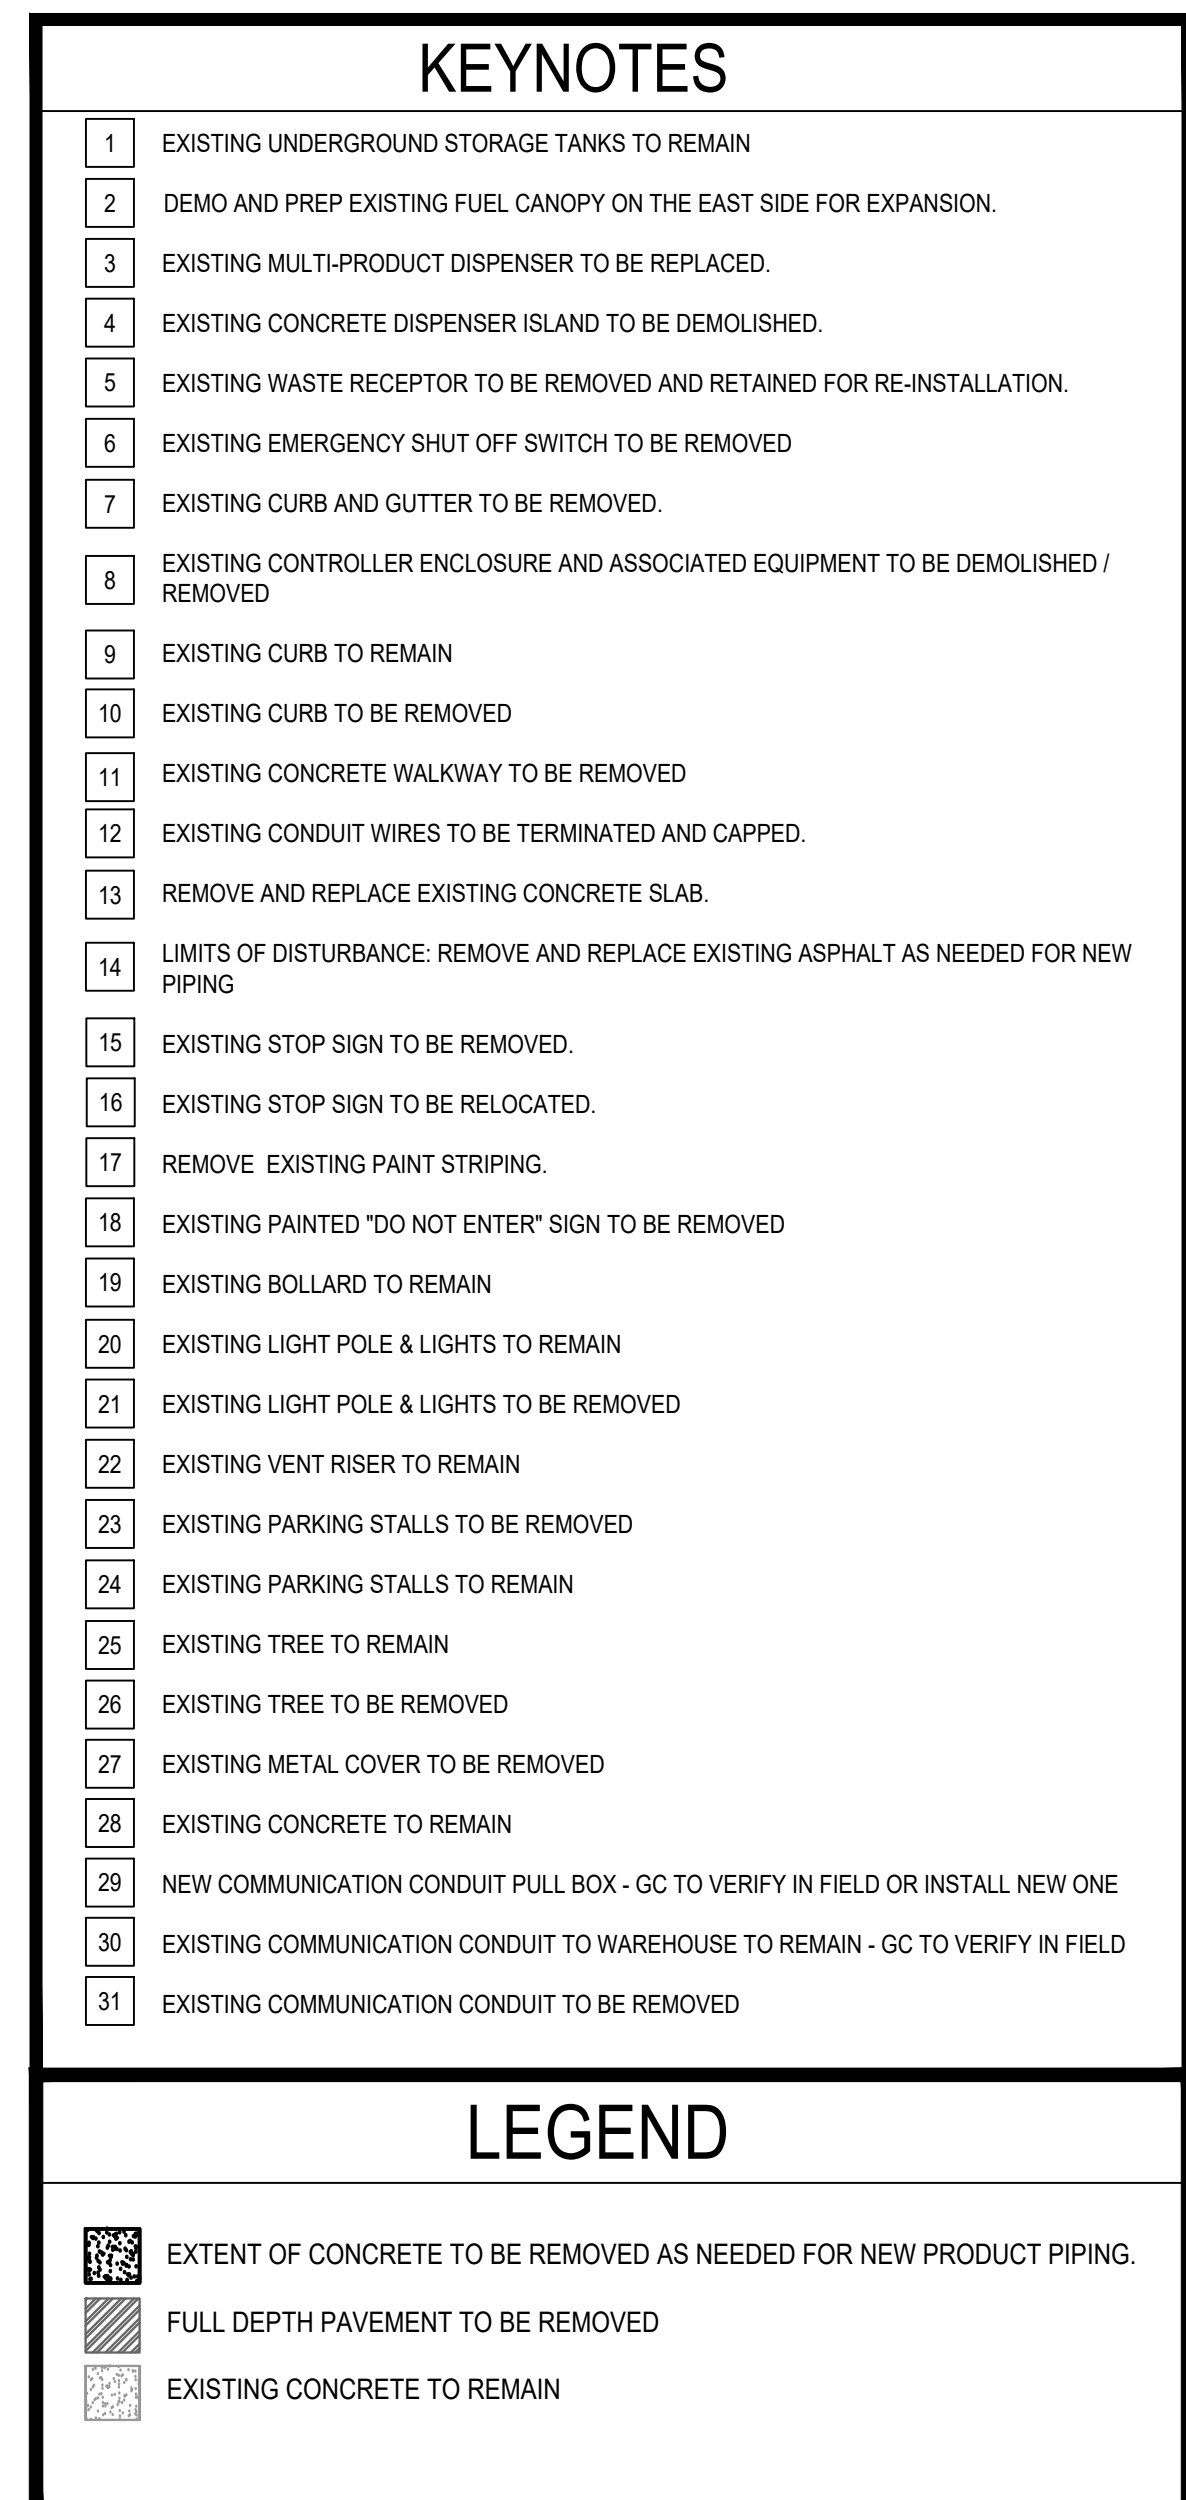



- THE BUILDING WILL BE OCCUPIED AND IN FULL USE BY THE OWNER DURING CONSTRUCTION.
1. CONSTRUCTION THAT MAY AFFECT THE PUBLIC SHALL BE DONE DURING OFF-HOURS
2. AREAS OF DEMOLITION SHALL INCLUDE, BUT ARE NOT LIMITED TO, ANY STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND PAVING WORK.
3. THE CONTRACTOR SHALL COMPLETE THE DEMOLITION WORK. THE CONTRACTOR IS TO REMOVE ALL WALLS, BOLLARDS, ASSC. STEEL, PLUMBING, ELECTRICAL, RAISED CONCRETE SLAB, CURBS, REBARS, ETC. ASSOCIATED WITH DEMOLITION OF AREAS.
4. ALL EXISTING ITEMS NOT TO BE REMOVED SHALL BE OFFERED IN GOOD CONDITION TO THE OWNER. DURING THE BIDDING PERIOD, COORDINATE AND VERIFY WITH THE OWNER AS TO WHICH ITEMS ARE TO BE SAVED.
5. DO NOT INTERRUPT AND DO NOT REMOVE PLUMBING, FIRE SPRINKLER, ETC. WITHOUT PRIOR WRITTEN APPROVAL OF THE OWNER.
6. PROVIDE AND MAINTAIN EGRESS PATHS THROUGHOUT CONSTRUCTION INCLUDING, BUT NOT LIMITED TO, EXIT SIGNS AND EXIT SPRINKLERS. OBTAIN FIRE MARSHAL APPROVAL PRIOR TO CLOSING ANY EGRESS OPENINGS AND/OR EGRESS PATHS DURING DEMOLITION/CONSTRUCTION.
7. THE CONTRACTOR SHALL LOCATE ALL EXISTING UNDERGROUND UTILITIES WITHIN PROXIMITY OF THE WORK AREA PRIOR TO EXCAVATION.
8. EXISTING UTILITIES SHOWN HAVE BEEN OBTAINED FROM AVAILABLE RECORDS AND ARE SHOWN FOR CONVENIENCE ONLY. VERIFY ALL INVERT ELEVATIONS AT POINTS OF INTERSECTION OF NEW AND EXISTING UTILITIES.
9. PROVIDE TEMPORARY DUST PARTITIONS AS REQUIRED TO PREVENT DUST AND DEBRIS FROM SETTLING ON ADJACENT AREAS NOT UNDER CONSTRUCTION. REVIEW WITH AND OBTAIN CEMEX APPROVAL FOR LOCATION.
10. CAP ALL UTILITIES AND DRAIN PIPES BELOW THE FLOOR AS REQUIRED. CONTRACTOR IS RESPONSIBLE FOR FLOOR PATCHING.
11. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING OR REPLACING ITEMS DAMAGED DURING DEMOLITION AND CONSTRUCTION.
12. WHEN CUTTING AND PATCHING, THE CONTRACTOR SHALL USE METHODS LEAST LIKELY TO DAMAGE ELEMENTS RETAINED OR ADJOINING SURFACES. CUT HOLES AND SLOTS AS SMALL AS POSSIBLE, NEATLY TO SIZE REQUIRED AND WITH MINIMUM DISTURBANCES OF ADJACENT MATERIALS.
13. WHERE EXISTING CONSTRUCTION IS REMOVED, CUT OR OTHERWISE DISTURBED, PATCH TO MATCH THE EXISTING ADJACENT SURFACES. SEAMS TO BE AS INVISIBLE AS PRACTICALLY POSSIBLE. FINISHES SHALL BE MATCHED TO THE HIGHEST VISUAL BREAK LINES SUCH AS CORNERS, CEILING LINES, TOP OF BASE, ETC.
14. WHERE NEW WORK ABUTS OR ALIGNS WITH EXISTING, PROVIDE A SMOOTH AND EVEN TRANSITION. PATCHED WORK TO MATCH EXISTING ADJACENT WORK IN TEXTURE AND APPEARANCE.
15. REMOVE AND REPLACE AREAS, SURFACES OR ITEMS THAT MAY NOT BE SATISFACTORY.
16. AS A MINIMUM, THE LEVEL OF WORKMANSHIP SHALL MATCH THE GENERAL LEVEL OF EXISTING WORKMANSHIP.
17. UNLESS SHOWN ON THE DRAWINGS, CONTRACTOR, DO NOT SUPPORT OR SUSPEND ITEMS, EQUIPMENT, HANGING OR FROM EXISTING STRUCTURAL MEMBERS (BEAMS, TRUSSES, JOIST, ETC.) WITHOUT WRITTEN APPROVAL OF A LICENSED STRUCTURAL ENGINEER.
18. DO NOT CUT OR DRILL ANY STRUCTURAL MEMBER PARTICULARLY ROOF JOIST) WITHOUT WRITTEN APPROVAL.
19. SHORING OF STRUCTURAL FOUNDATIONS, STRUCTURES, AND/OR TRENCING REQUIRED TO COMPLETE THE WORK DESCRIBED IN THE DOCUMENTS IS CONSIDERED A MEANS, METHOD OR TECHNIQUE AND IS THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN WRITTEN APPROVAL. THE CONTRACTOR REQUIRES A LICENSED ENGINEER TO SUPERVISE, APPROVE, AND/OR PROVIDE DRAWINGS FOR STRUCTURAL FOUNDATIONS, STRUCTURES, AND/OR TRENCING. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO CONTRACT WITH THE ENGINEER DIRECTLY AND THE ENGINEER WILL BE IN CHARGE OF THE WORK.
20. ALL SYSTEMS AND SERVICES ARE TO BE LEFT OPERATIONAL PRIOR TO THE END OF EACH WORKDAY.
21. THE CONTRACTOR SHALL REMOVE ALL RUBBLE AND DEBRIS FROM THE JOBSITE DAILY AND LEAVE THE BUILDING AND GROUND BORE CLEAN UPON COMPLETION OF THE WORK.

1. THE CONTRACTOR TO SUBMIT PHASING PLAN AT BID. THE CONTRACTOR SHALL CONFIRM THE OPERATIONAL PHASING WITH THE OWNER PRIOR TO STARTING CONSTRUCTION.
2. THE PHASING SHOWN IS NOT INTENDED TO REPRESENT OR DICTATE CONSTRUCTION PHASING, MEANS, METHODS OR TECHNIQUES.
3. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL CONSTRUCTION PHASING SO AS NOT TO IMPACT THE DIVISIONS.
4. REMOVE WALLS, BOLLARDS, PLUMBING, ELECTRICAL, ETC. AND CAP UTILITIES BELOW THE FLOOR AS REQUIRED TO ACHIEVE THE OPERATIONAL PHASING.
5. PROVIDE TEMPORARY UTILITIES AS REQUIRED DURING PHASING.
6. WHEN THE WORK INCLUDES DEMOLITION OF OR TEMPORARILY COVERING OF THE EXISTING ELEVATOR SIGNAGE, THE CONTRACTOR SHALL PROVIDE TEMPORARY "COSTO WHOLESALE" SIGNAGE OF THE SAME SIZE AND LOCATION. EXISTING SIGN LIGHTS PERMANENT SIGN IS INSTALLED. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS. PROVIDE ILLUMINATION FOR THE TEMPORARY SIGN. CONFIRM LOCATIONS WITH THE OWNER.

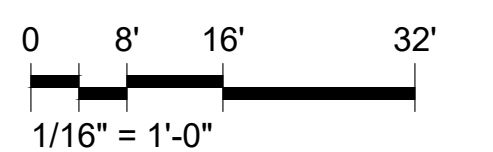

DOUGLAS E. BROOKBANK, ARCHITECT

[illegible]



DOUGLAS E. BROOKBANK, ARCHITECT

REFLECTED CEILING PLAN NOTES:

EXISTING CANOPY LIGHTS TO BE REMOVED AND REPLACED WITH NEW LIGHTS.

EXISTING CANOPY LIGHTS TO BE REMOVED AND REPLACED WITH NEW LIGHTS.

EXISTING FASCIA SIGN LIGHT FIXTURE TO BE REMOVED AND REPLACED WITH NEW FIXTURE

REFER ELECTRICAL DRAWINGS FOR EXACT LOCATION AND TYPE OF ELECTRICAL FIXTURES.

98-4150-19
PM: AGNES VINCENT
DRAWN: AV
AUGUST 8, 2023

CANOPY
REFLECTED
CEILING PLAN

AG-4