


SITE DATA TABLE

MAP 67, PARCEL 85.05 ADDRESS: 730 TENNESSEE BLVD CITY: LEBANON COUNTY: WILSON STATE: TENNESSEE	
TOTAL PROJECT AREA	149,716 S.F. (3.44 A.C.)
ZONING	IM
BUILDING COVERAGE (ALLOWED)	60.0% (89,830 S.F.)
BUILDING COVERAGE (EXISTING)	3.00% (4,492 S.F.)
BUILDING COVERAGE (PROVIDED)	3.65% (5,472 S.F.)
BUILDING COVERAGE (TOTAL)	6.65% (9,964 S.F.)
EXISTING IMPERVIOUS AREA	33,403 S.F.
PROPOSED IMPERVIOUS AREA	33,285 S.F.
PARKING (REQUIRED)	1 SPACE/ 500 S.F. OF GROSS FLOOR AREA 9,964 S.F. GFI = 20 SPACES
PARKING (EXISTING)	36 SPACES TOTAL
PARKING (PROPOSED)	22 SPACES TOTAL
HANDICAP PARKING (REQUIRED)	1 SPACES
HANDICAP PARKING (PROPOSED)	1 SPACES
YARD REQUIREMENTS	FRONT YARD: 50' SIDE YARD: 30' REAR YARD: 40'

- GENERAL NOTES:**
- ALL UTILITIES ARE PROPOSED TO BE UNDERGROUND.
 - ALL BUILDING MATERIALS SHALL BE DISPOSED OFF-SITE.
 - MATERIAL SHALL BE DISPOSED IN CONFORMANCE WITH STATE AND LOCAL REGULATIONS.
 - ALL LIGHTING SHALL BE FULLY CUT-OFF RECESSED BOX LIGHTS WITH A FLAT LENS, OR SHIELDED. IN ADDITION, WALL LIGHTING SHALL NOT ILLUMINATE ADJACENT ROADS OR PROPERTY; NO WALL PICKS ARE ALLOWED IN THE CITY.
 - PARAPET WALL SHALL BE EQUAL TO OR HIGHER THAN ALL ROOF MOUNTED HVAC EQUIPMENT. ALL ROOFTOP EQUIPMENT WILL BE SCREENED 100% FROM HORIZONTAL VIEW.
 - ALL WALL MOUNTED UTILITY EQUIPMENT TO BE PAINTED TO MATCH FACADE OF BUILDING.
 - ALL PROPOSED SIDEWALK SHALL HAVE A MAXIMUM CROSS SLOPE 2.0%.
 - CONTRACTOR SHALL ENSURE POSITIVE DRAINAGE AWAY FROM PROPOSED AND EXISTING BUILDING STRUCTURE.
 - SALLYPORT / PATIO AREA SHALL HAVE A MINIMUM SLOPE OF 1.00% AWAY FROM THE PROPOSED AND EXISTING BUILDING TO ENSURE DRAINAGE AWAY FROM THE STRUCTURE.

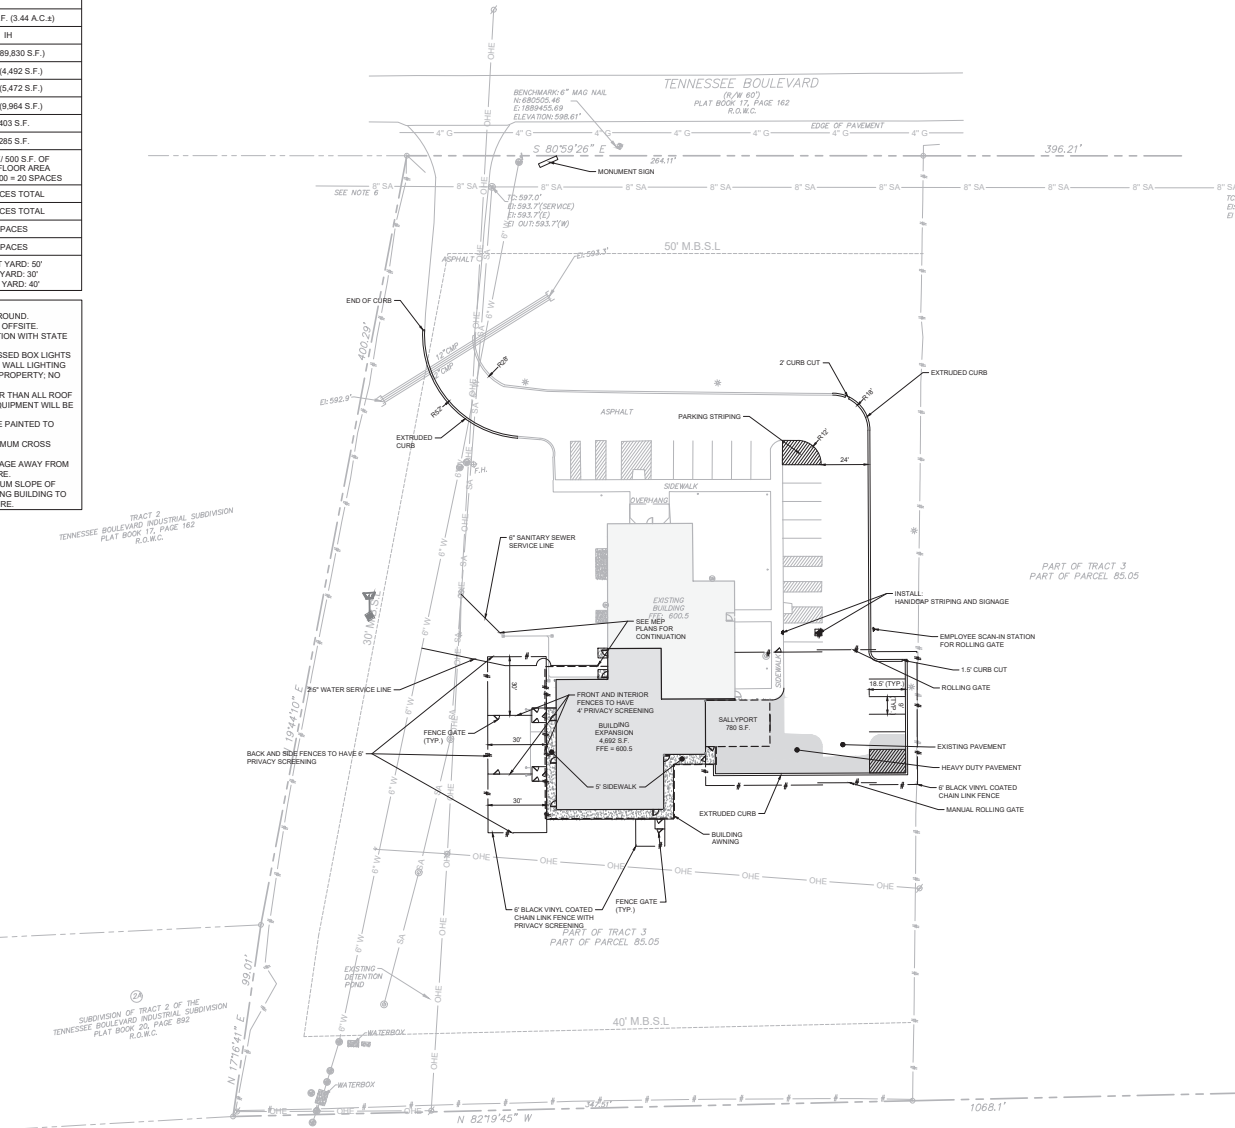

MAP 67, PARCEL 85.05

PROJECT BENCHMARK:
 DESCRIPTION: 6" MAG NAIL
 DEPTH: 10'-0" (10'-0" TO 10'-6")
 ELEVATION: 596.61'
 DATE: 01/11/2024

SCALE: 1"=30'

PLAN SET REVISION LOG


NO.	DATE	DESCRIPTION
1	01/11/2024	Final Design
2	01/11/2024	Revised Design
3	01/11/2024	Revised Design
4	01/11/2024	Revised Design
5	01/11/2024	Revised Design
6	01/11/2024	Revised Design
7	01/11/2024	Revised Design
8	01/11/2024	Revised Design
9	01/11/2024	Revised Design
10	01/11/2024	Revised Design

GEOTECHNICAL NOTES:

1. CONTRACTOR TO ENSURE POSITIVE DRAINAGE AWAY FROM ALL STRUCTURES BOTH DURING AND POST CONSTRUCTION.
2. CONTRACTOR TO SCARIFY AND RECOMPACT THE UPPER 6 TO 10 INCHES OF SOIL IN CUT AREAS.
3. CONTRACTOR TO VERIFY THAT SUBSURFACE PIPING BENEATH STRUCTURES IS CAREFULLY CONSTRUCTED AND PRESSURE TESTED PRIOR TO ITS PLACEMENT IN SERVICE.

NOTE:

CONTRACTOR TO ENSURE THAT DISCHARGE FROM THE DOWNSPOUTS MAINTAINS POSITIVE DRAINAGE AWAY FROM THE BUILDING FOUNDATION.

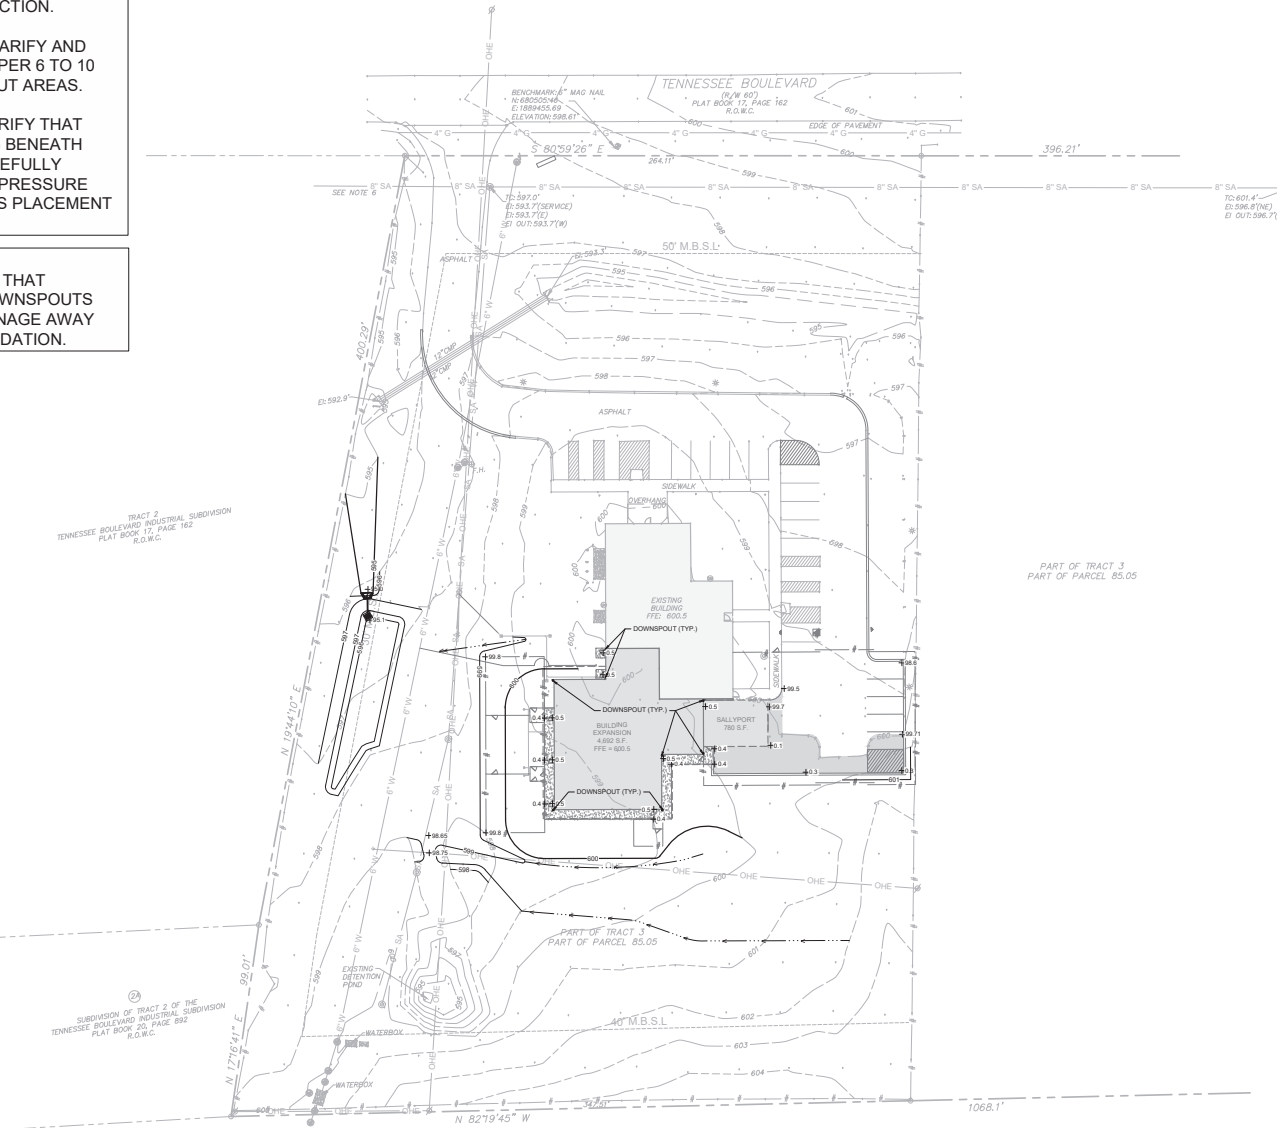

MAP 67, PARCEL B5.05

PROJECT BENCHMARK
DESCRIPTION: 6" MAG NAIL
ELEVATION: 598.61
ELEVATION: 598.61
ELEVATION: 598.61

SCALE: 1"=30'



HERITAGE CIVIL

2035 N. Hill Street, Suite 203
Memphis, TN 38102
Jahid@HeritageCivil.com
615.945.5444

WILSON COUNTY ANIMAL SHELTER
SITE PLAN
910 Tennessee Blvd., Lebanon, Wilson County, Tennessee
Map 67 - Parcel B5.05

NO.	DATE	REVISION
1	01/15/2024	Initial Design
2	02/15/2024	Revised Design
3	03/15/2024	Final Design
4	04/15/2024	As-Built


NOT FOR CONSTRUCTION

GRADING & DRAINAGE PLAN


C2.00

PROJECT NO. 23-040-01

SWPPP - STAGE 1

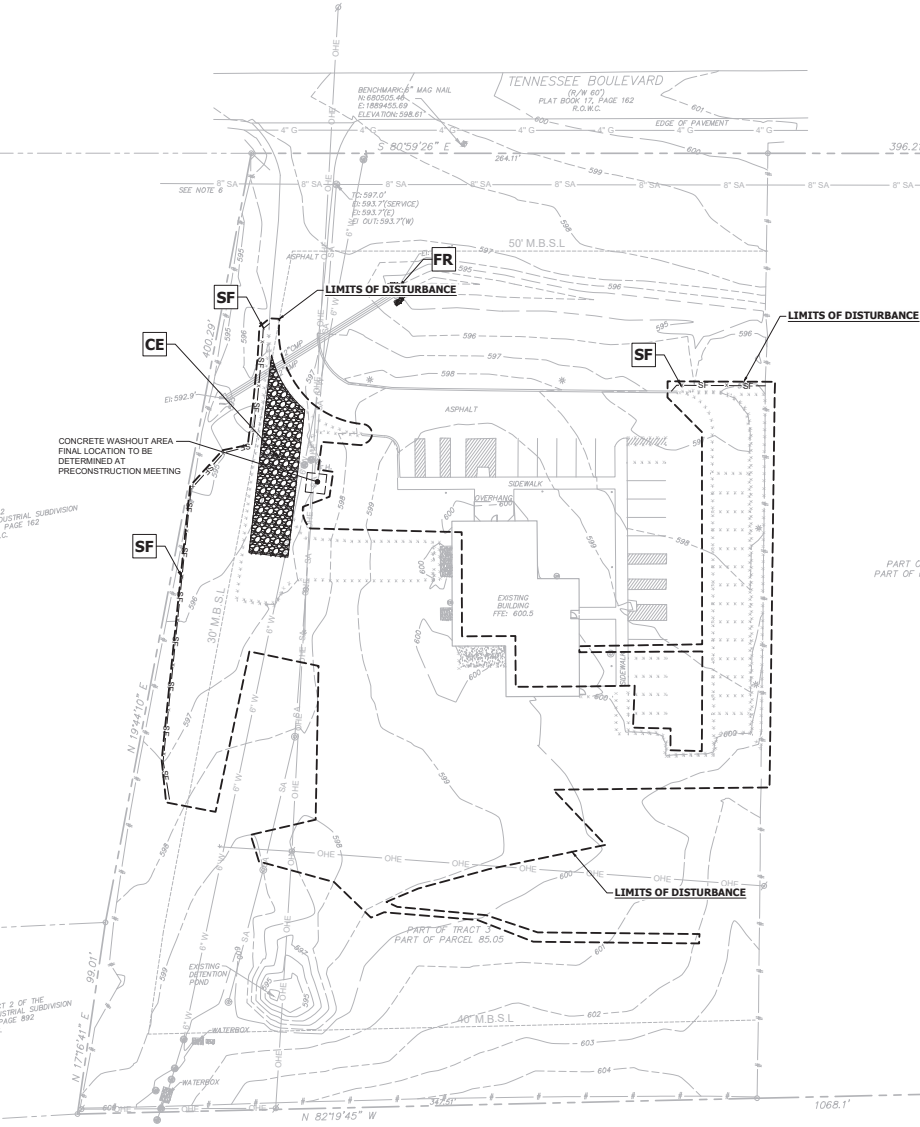

SWPPP - STAGE 2 & 3

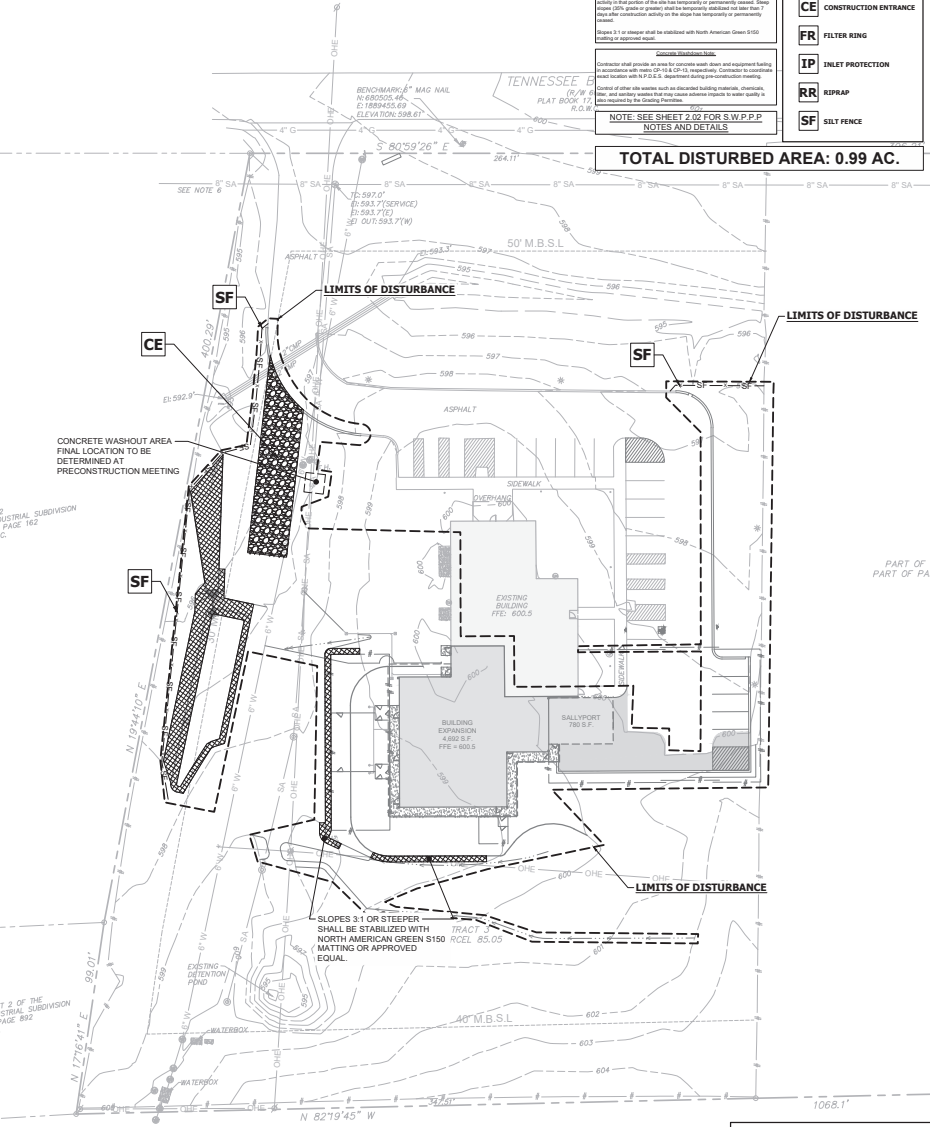

SWPPP LEGEND

- CD CHECK DAM
- CE CONSTRUCTION ENTRANCE
- FR FILTER RING
- IP INLET PROTECTION
- RR REBRAP
- SF SILT FENCE

TOTAL DISTURBED AREA: 0.99 AC.

NOTES AND DETAILS

As necessary, temporary roads or other occupancies (BMP's) will be added to the SWPPP plan to prevent any water from creating any other adverse impact on the site.

Temporary or permanent road construction or other construction (BMP's) for a phase of the project must be completed no later than 14 days after the construction activity is initiated. The plan shall be updated to reflect any changes. Slopes shall be stabilized with North American Green S150 or approved equivalent. Slopes shall be stabilized with North American Green S150 or approved equivalent. Slopes shall be stabilized with North American Green S150 or approved equivalent.

Contractor shall provide an area for concrete wash down and equipment washing. The area shall be located within the limits of disturbance. The area shall be located within the limits of disturbance. The area shall be located within the limits of disturbance.

NOTE: SEE SHEET 2.00 FOR SWPPP NOTES AND DETAILS

HERITAGE CIVIL

2085 N. Hill, Juliet, TN 37022
 ML, Juliet, TN 37022
 julie@heritagecivil.com
 615.545.5666

WILSON COUNTY ANIMAL SHELTER
 SITE PLAN
 910 Tennessee Blvd, Lebanon, Wilson County, Tennessee
 Map 67 - Parcel B500

PLAN SET REVISION LOG
1. Initial Design
2. Final Design
3. Construction
4. Final Construction
5. Final Construction
6. Final Construction
7. Final Construction
8. Final Construction
9. Final Construction
10. Final Construction

NOT FOR CONSTRUCTION

SWPPP PLAN

C2.01

110 PROJECT NO. 25-040-01

